

Description

The USS0212 Universal Redundancy Switch is a state-of-the-art product designed to provide a cost effective and scalable 1+1 protection scheme for modulators, demodulators and modems.

The USS0212 has a set of advanced features which guarantees a very low switching time significantly increasing the service availability. The USS0212 enables the cost effective implementation of reliable IP protection schemes requested by modern IP head-end architecture.

The switch and the switch back operations between the main and the spare modulator can be done automatically through alarm contacts, manually through the front panel, a dedicated web GUI, or remotely via a monitoring and control system.

When the automatic mode is activated, the USS0212 continuously monitors the protected devices. When there is an alarm, the USS0212 triggers a redundancy switch towards the devices, in line with rules defined by the set of parameters governing the switching operation.

The USS0212 is easy to install, configure, control and operate. The web interface presents an intuitive synoptic view of the setup and the SNMP interface allows simple integration into NMS systems.


Key features

- Switchable signals: ASI/G.703, IF or L-band
- Logical GbE Switching for interfacing with IP modems
- User-configurable switching logic
- Standalone operation or easily integrated into NMS systems via SNMP
- GUI with synoptic view
- Front Panel interface for monitoring and manual operation
- Automatic or manual operational mode
- Automatic Switch Back
- Dual redundant power supply with monitoring
- Fully integrated with Newtec equipment for easy operation
- Ability to sync configurations between main and backup Newtec device, with possibility to exclude some parameters
- Easy operation
- Flexible deployment and device hot swap

Applications

Redundancy setups in uplinks or receive stations in the context of Broadcast, IP Trunking or any other application where satellite related earth equipment is deployed in a fail-safe, redundant 1+1 setup.

Example Configurations

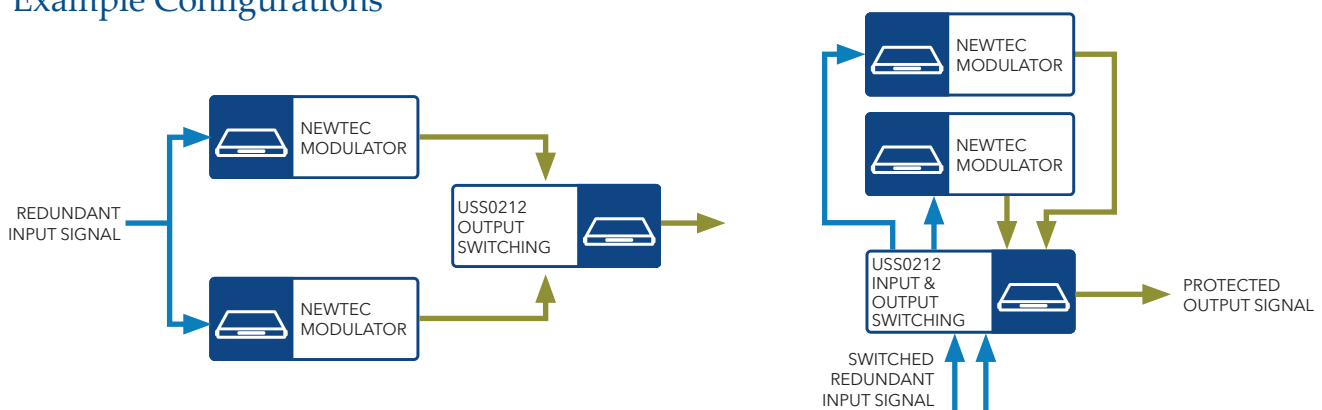



Related Products

- M6100 Broadcast Satellite Modulator
- MDM6100 Broadcast Satellite Modem
- MDM6000 Satellite Modem
- USS0212 1+1 Redundancy Switch
- All Azimuth and Elevation products

Input interface switch

ASI

- Connectors 4 x BNC (F) - 75 ohm
- Frequency DC - 270 MHz
- Insertion loss < 2 dB
- Isolation > 50 dB (300 MHz)

Output interface switch

IF (75 OHMS, DC - 270 MHZ)

- Connectors BNC (F) - 75 ohm
- Frequency DC - 270 MHz
- Insertion loss < 2 dB
- Isolation > 50 dB (300 MHz)

IF (50 OHMS, DC - 270 MHZ)

- Connectors BNC (F) - 50 ohm
- Frequency DC - 270 MHz
- Insertion loss < 2 dB
- Isolation > 50 dB (300 MHz)

L-BAND (50 OHMS, DC-2.5 GHZ)

- Connectors BNC (F) - 50 ohm
- Frequency DC - 2.5 GHz
- Return loss > 18 dB (L band)
- Insertion loss < 0.5 dB
- Isolation > 75 dB (L band)

L-BAND (50 OHMS, DC- 2.15 GHZ)

- Connectors SMA (F) - 50 ohm
- Frequency DC - 2.15 GHz
- Return loss > 14 dB
- Insertion loss < 2 dB
- Isolation > 50 dB

L-BAND (50 OHMS, DC - 18 GHZ)

- Connectors SMA (F) - 50 ohm
- Frequency DC - 18 GHz
- Return loss > 18 dB (L band) >13 dB (RF)
- Insertion loss < 0.5 dB
- Isolation > 75 dB (L band) >60 dB (RF)

Generic

MONITOR AND CONTROL INTERFACES (VIA THE MAIN UNIT)

- Web server GUI (HTTP) via web browser
- Diagnostics report, alarm log (HTTP)
- Control of Newtec devices with RMCP over TCP/IP
- SNMP v.2c

Physical (main and extension units)

- 1RU, width: 19", depth 51 cm, 6 kg
- Dual Power supply: 100 & 180-260 Vac, 105 VA, 47-63 Hz
- Temperature
 - Operational: 0°C to 37°C
 - Storage: -40 to +70°C
- Humidity: 5% to 85% non-condensing
- CE label, UL pending

Ordering information

USS0212 1+1 Redundancy Switch		Ordering n°
Default configuration		
1+1 Redundancy Switch, SNMP		USS0212
Input interface switch: No input switching		
Output interface switch: IF, BNC, 75 ohm, DC - 270 MHz		
Configuration Options Category		
Max. 1 option per category		
Input interface switch	No input switching	Default
	ASI / G.703, BNC 75 ohm	DA-01
	GbE Logical Switching	DA-05
Output interface switch	IF, BNC, 75 ohm, DC - 270 MHz	Default
	IF, BNC, 50 ohm, DC - 270 MHz	DB-01
	L-band, BNC, 50 ohm, DC - 2.5 GHz	DB-03
	L-band/RF, SMA, 50 ohm, DC - 18 GHz	DB-04
	L-band, SMA, 50 ohm, DC - 2.15 GHz*	DB-05
Services Category		
Max. 1 option per category		
Support	Care Pack 3 Basic	GA-08
	Care Pack 3 Enhanced	GA-09

(*) Toggle switch

Contact your sales representative for details
(sales@newtec.eu)

This brochure is provided for information purposes only.
The details contained in this document, including product and feature specifications, are subject to change without notice and shall not bind Newtec in any way.

Newtec

SHAPING THE FUTURE OF SATELLITE COMMUNICATIONS

Europe
Tel: +32 3 780 65 00
Fax: +32 3 780 65 49

North-America
Tel: +1 203 323-0042
Fax: +1 203 323-8406

South-America
Tel: +55 11 2092 6220
Fax: +55 11 2093 3756

Asia-Pacific
Tel: +65 6777 22 08
Fax: +65 6777 08 87

China
Tel: +86 10-823 18 730
Fax: +86 10-823 18 731

MENA
Tel: +971 4 443 60 58
Fax: +971 4 368 67 68