

AZ200

Universal Switching System

Azimuth Product Family

AZIMUTH

SERIES

Description

The AZ200 Universal Switching System is a powerful and modular product designed to provide a cost effective N+1 protection scheme for a wide variety of equipment such as modulators, demodulators, modems, converters, encoders and decoders.

The AZ200 meets simple and complex demanding protection requirements by operating and controlling up to 36 internal switching modules.

The very high modularity of the AZ200 guarantees the design optimization for each configuration, reducing the cost and providing a high reliability.

The internal switching modules are inserted in the AZ200 main unit, or, for complex configurations, in up to eight AZ201 extension units, connected to the main AZ200 unit.

Switching can be done automatically through alarm contacts, manually through the front panel or the dedicated web interface, or remotely via a monitoring and control system.

When the automatic mode is activated, the AZ200 monitors continuously the set of parameters governing the switching operation in order to activate the redundant path while triggering the loading of parameters from memory.

The AZ200 provides a wide range of switching capabilities for almost any input and output signals used in satellite communications. The range of switchable signals include ASI, G.703, SDH, HSSI or IP interfaces, as well as IF, L-band or RF band signals.

Key features

- Dual redundant power supply – Main & Extension unit
- Automatic or manual operational mode
- Operates and controls up to 36 switching modules
- Switchable signals: ASI, IP, G.703, SDH, HSSI, IF, L-band and RF-band
- Stand alone operation or integrated in a network management system
- Suitable for any equipment with alarm contacts

Main advantages

- Increases service availability significantly
- Low cost solution
- Compatible with any equipment that has alarm contacts
- High reliability
- High compactness
- Scalability

Applications

- Broadcast contribution and distribution
- IP trunking / Corporate networks
- Any up or downlink facility

Related products

AZ210 1+1 Modulator Redundancy Switch
AZ270 1+1 Frequency Redundancy Switch
AZ290 1+1 Demodulator Redundancy Switch

Related products

Care Pack Brochure



Main unit



Extension unit




SHAPING THE FUTURE OF SATELLITE COMMUNICATIONS

www.newtec.eu

R3/11.2009

Specifications – AZ200(R7)

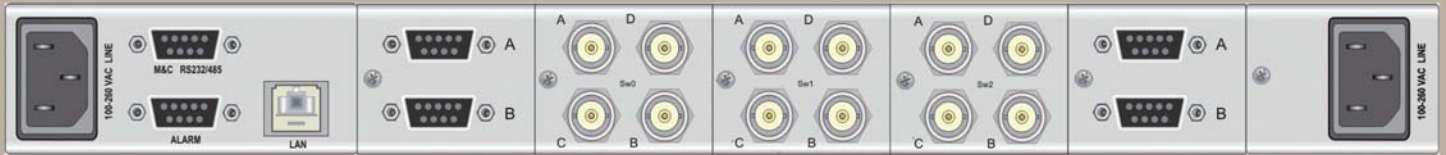

Main Interface Switches

IF (50 ohms, DC – 270 MHz) (optional)

- Connectors BNC (F) - 50 ohms
- Frequency DC - 270 MHz
- Insertion loss < 2 dB
- Isolation > 50 dB (300 MHz)
- Signal IF

IF (75 ohms, DC - 270 MHz) (optional)

- Connectors BNC (F) - 75 ohms
- Frequency DC - 270 MHz
- Insertion loss < 2 dB
- Isolation > 50 dB (300 MHz)
- Signals IF, video, G.703, ASI, SDI

L-band (50 ohms, DC-2.5 GHz) (optional)

- Connectors BNC (F) - 50 ohms
- Frequency DC - 2.5 GHz
- Return loss > 18 dB (L band)
- Insertion loss < 0.5 dB
- Isolation > 75 dB (L band)
- Signals L-band

L-band (50 ohms, DC-1.8 GHz) (optional)

- Connectors SMA (F) - 50 ohms
- Frequency DC – 1.8 GHz
- Return loss > 15 dB
- Insertion loss < 2 dB
- Isolation > 50 dB
- Signals L-band

L-band (75 ohms, DC – 2.5 GHz)

- Connectors BNC (F) – 75 ohms
- Frequency DC – 2.5 GHz
- Return loss > 18 dB
- Insertion loss < 0.5 dB
- Isolation > 75 dB
- Signals L-band, HD-SDI

L-band (50 ohms, DC – 18 GHz) (optional)

- Connectors SMA (F) - 50 ohms
- Frequency DC - 18 GHz
- Return loss > 18 dB (L band) >13 dB (RF)
- Insertion loss < 0.5 dB
- Isolation > 75 dB (L band) >60 dB (RF)
- Signals L-band, RF

Optical, SC, single mode

- Connector 2 x duplex SC receptacles
- Minimum input power -30dBm
- Minimum output power -15dBm
- Wavelength 1300 nm
- Compliance SONET OC3 & SDH STM1 (S1.1)
- Signal SDH

Optical, SC, multi mode

- Connector 2 duplex SC receptacles
- Minimum input power -30dBm
- Minimum output power -23.5dBm
- Wavelength 1300 nm
- Compliance ATM Forum UNI SONET OC-3 Multimode
- Signal Fiber Physical layer specification SDH

HSSI (optional)

- Connectors 25 pin sub-D (F)
- Switch type 2 inputs/ 2 outputs
- Frequency 2 positions: straight & cross-over
- Isolation DC - 52 MHz > 30 dB (balanced)

Other switching modules for audio signals, wave guides and data signals are available upon request.

Input Interface Splitters

IF splitter

- Connector (in, out) BNC (F) - 75 ohms
- Frequency 40 – 1000 MHz
- Insertion loss < 5dB
- Isolation > 15dB

L-band Splitter

- Connector (in, out) F (F) – 75 ohms
- Frequency 950 – 2150 MHz
- Insertion loss < 6dB
- Isolation > 15dB

Generic

Monitor and control interfaces (via the main unit)

- Web based GUI
- Diagnostics report, alarm log
- RMCP over TCP-IP/UDP and RS232/RS485
- SNMP v2c

Physical (Main and Extension units)

- 1RU, width: 19", depth 51 cm, 6 kg
- Dual Power supply: 100-240 VAC, 105 VA, 47-63 Hz
- Temperature
 - Operational: 0°C to 37°C
 - Storage: -40 to +70°C
- Humidity: 5% to 85% non-condensing
- CE label, UL label

Ordering

The AZ200 will be customized according to your specific needs. Please provide a description of your equipment setup to our sales department to receive a configuration proposal.

Please contact your sales representative for detail (sales@newtec.eu)

Europe

Tel: +32 3 780 65 00
Fax: +32 3 780 65 49

North-America

Tel: +1 203 323-0042
Fax: +1 203 323-8406

South-America

Tel: +55 11 2092 6220
Fax: +55 11 2093 3756

Asia-Pacific

Tel: +65 6777 22 08
Fax: +65 6777 08 87

China

Tel: +86 10-823 18 730
Fax: +86 10-823 18 731

MENA

Tel: +971 4 390 18 78
Fax: +971 4 368 67 68