

CGHV38375F

400 W, 2.75 - 3.75 GHz, Internally-Matched, GaN on SiC Transistor (IM-FET)

Description

Wolfspeed's CGHV38375F is a packaged, 400 W HPA matched to 50 ohms at both input and output ports. The CGHV38375F operates from 2.75 - 3.75 GHz providing coverage over the entire S-Band radar band. This high-power amplifier provides >10 dB of large signal gain and 40% power-added efficiency and is ideally suited as a high-power building block supporting both pulsed and CW radar applications.



PN: CGHV38375F
Package Type: 440226

Typical Performance Over 2.75 - 3.75 GHz ($T_c = 25^\circ\text{C}$)

Parameter	2.75 GHz	2.9 GHz	3.3 GHz	3.5 GHz	3.75 GHz	Units
Small Signal Gain ^{1,2}	10.0	12.5	12.6	12.6	13.5	dB
Output Power ^{1,3}	55.9	57.4	57.5	57.7	56.8	dBm
Power Gain ^{1,3}	9.9	11.4	11.5	11.7	10.8	dB
Drain Efficiency ^{1,3}	50	67	62	60	60	%

Notes:

¹ $V_{DD} = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$

² Measured at Pin = -10 dBm

³ Measured at Pin = 46 dBm and 100 μs ; Duty Cycle = 10%

Features

- Full S-Band Radar Coverage
- 400 W Typical P_{SAT}
- 55% Typical Drain Efficiency
- >10 dB Large Signal Gain
- Pulsed and CW Operation

Note: Features are typical performance across frequency under 25°C, pulsed operation. Please reference performance charts for additional details.

Applications

- Civil and Military, Pulsed and CW S-Band Radar

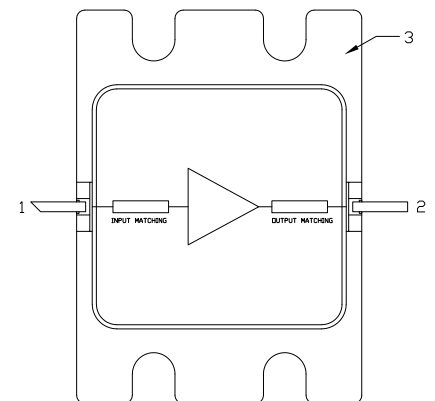


Figure 1.

RoHS
COMPLIANT

Absolute Maximum Ratings (not simultaneous) at 25 °C

Parameter	Symbol	Rating	Units	Conditions
Drain-source Voltage	V_{DS}	150	VDC	25°C
Gate-source Voltage	V_{GS}	-10, +2	VDC	25°C
Storage Temperature	T_{STG}	-55, +150	°C	
Maximum Forward Gate Current	I_G	80	mA	25°C
Maximum Drain Current	I_{DMAX}	24	A	
Soldering Temperature	T_S	260	°C	
Junction Temperature	T_J	225	°C	MTTF > 1e6 Hours

Electrical Characteristics (Frequency = 2.75 GHz to 3.75 GHz unless otherwise stated; $T_c = 25^\circ\text{C}$)

Characteristics	Symbol	Min.	Typ.	Max.	Units	Conditions
DC Characteristics						
Gate Threshold Voltage	$V_{GS(TH)}$	-3.8	-3.0	-2.3	V	$V_{DS} = 10\text{ V}, I_D = 83.6\text{ mA}$
Gate Quiescent Voltage	$V_{GS(Q)}$	-	-2.7	-	V _{DC}	$V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}$
Saturated Drain Current ¹	I_{DS}	54.4	77.7	-	A	$V_{DS} = 6.0\text{ V}, V_{GS} = 2.0\text{ V}$
Drain-Source Breakdown Voltage	V_{BD}	125	-	-	V	$V_{GS} = -8\text{ V}, I_D = 83.6\text{ mA}$
RF Characteristics²						
Small Signal Gain	S_{21_1}	-	12.5	-	dB	Pin = -10 dBm, Freq = 2.75 - 3.75 GHz
Output Power	P_{OUT1}	-	55.9	-	dBm	$V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}, P_{IN} = 46\text{ dBm}$, Freq = 2.75 GHz
Output Power	P_{OUT2}	-	57.4	-	dBm	$V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}, P_{IN} = 46\text{ dBm}$, Freq = 2.9 GHz
Output Power	P_{OUT3}	-	57.5	-	dBm	$V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}, P_{IN} = 46\text{ dBm}$, Freq = 3.3 GHz
Output Power	P_{OUT4}	-	57.7	-	dBm	$V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}, P_{IN} = 46\text{ dBm}$, Freq = 3.5 GHz
Output Power	P_{OUT5}	-	56.8	-	dBm	$V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}, P_{IN} = 46\text{ dBm}$, Freq = 3.75 GHz
Drain Efficiency	DE_1	-	50	-	%	$V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}, P_{IN} = 46\text{ dBm}$, Freq = 2.75 GHz
Drain Efficiency	DE_2	-	67	-	%	$V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}, P_{IN} = 46\text{ dBm}$, Freq = 2.9 GHz
Drain Efficiency	DE_3	-	62	-	%	$V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}, P_{IN} = 46\text{ dBm}$, Freq = 3.3 GHz
Drain Efficiency	DE_4	-	60	-	%	$V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}, P_{IN} = 46\text{ dBm}$, Freq = 3.5 GHz
Drain Efficiency	DE_5	-	60	-	%	$V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}, P_{IN} = 46\text{ dBm}$, Freq = 3.75 GHz
Power Gain	G_{P2}	-	9.9	-	dB	$V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}, P_{IN} = 46\text{ dBm}$, Freq = 2.75 GHz
Power Gain	G_{P3}	-	11.4	-	dB	$V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}, P_{IN} = 46\text{ dBm}$, Freq = 2.9 GHz
Power Gain	G_{P4}	-	11.5	-	dB	$V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}, P_{IN} = 46\text{ dBm}$, Freq = 3.3 GHz
Power Gain	G_{P5}	-	11.7	-	dB	$V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}, P_{IN} = 46\text{ dBm}$, Freq = 3.5 GHz
Power Gain	G_{P6}	-	10.8	-	dB	$V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}, P_{IN} = 46\text{ dBm}$, Freq = 3.75 GHz

Electrical Characteristics (Frequency = 2.75 GHz to 3.75 GHz unless otherwise stated; $T_c = 25^\circ\text{C}$)

Characteristics	Symbol	Min.	Typ.	Max.	Units	Conditions
RF Characteristics²						
Input Return Loss	S11	–	-6	–	dB	Pin = -10 dBm, 2.75 - 3.75 GHz
Output Return Loss	S22	–	-6	–	dB	Pin = -10 dBm, 2.75 - 3.75 GHz
Output Mismatch Stress	VSWR	–	–	5 : 1	Ψ	No damage at all phase angles

Notes:

¹ Scaled from PCM data² Unless otherwise noted: Pulse Width = 100 μs, Duty Cycle = 10%
Thermal Characteristics

Parameter	Symbol	Rating	Units	Conditions
Operating Junction Temperature	T_j	177	$^\circ\text{C}$	Pulse Width = 100 μs, Duty Cycle = 10%, $P_{\text{DISS}} = 418\text{ W}$, $T_{\text{CASE}} = 85^\circ\text{C}$
Thermal Resistance, Junction to Case	$R_{\theta\text{JC}}$	0.22	$^\circ\text{C/W}$	
Operating Junction Temperature	T_j	185	$^\circ\text{C}$	CW, $P_{\text{DISS}} = 200\text{ W}$, $T_{\text{CASE}} = 85^\circ\text{C}$
Thermal Resistance, Junction to Case	$R_{\theta\text{JC}}$	0.5	$^\circ\text{C/W}$	

Typical Performance of the CGHV38375F

Test conditions unless otherwise noted: $V_D = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$, Pulse Width = $100\text{ }\mu\text{s}$, Duty Cycle = 10%, $P_{in} = 46\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

Figure 1. Output Power vs Frequency as a Function of Temperature

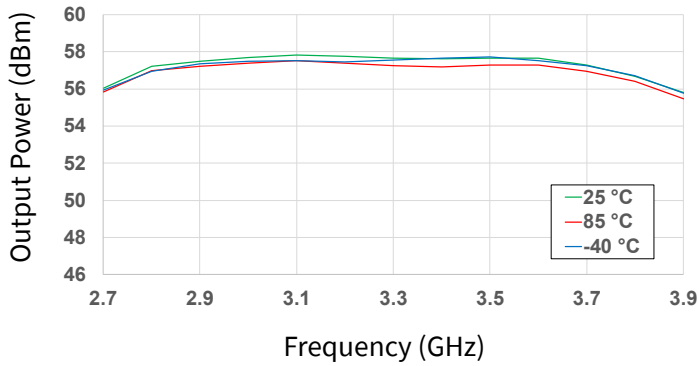


Figure 2. Output Power vs Frequency as a Function of Input Power

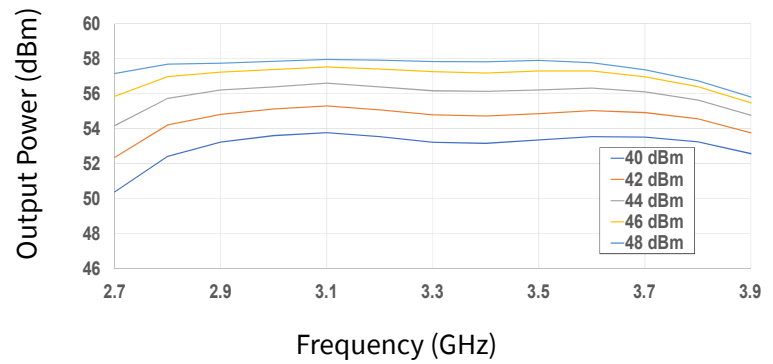


Figure 3. Drain Eff. vs Frequency as a Function of Temperature

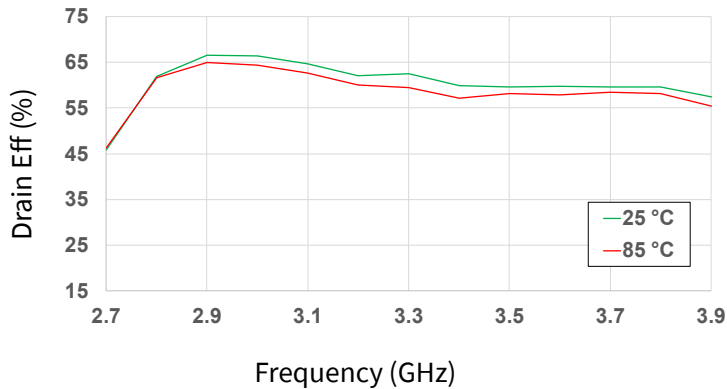


Figure 4. Drain Eff. vs Frequency as a Function of Input Power

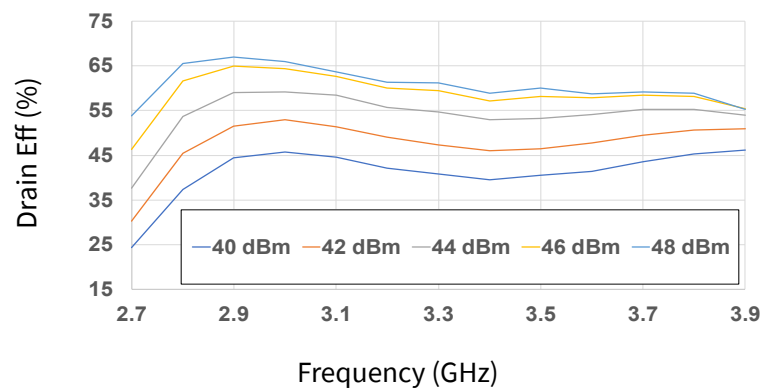


Figure 5. Drain Current vs Frequency as a Function of Temperature


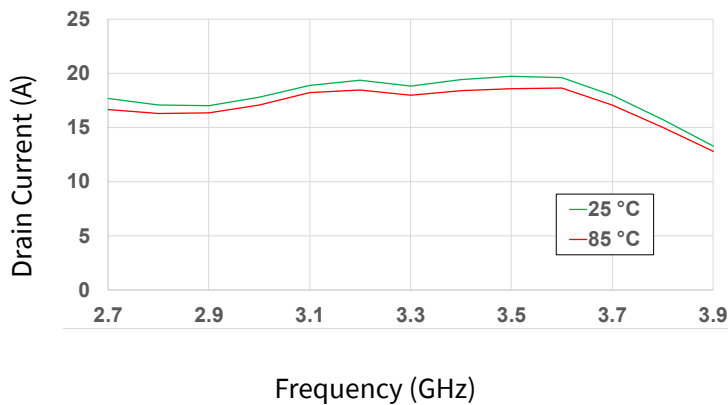


Figure 6. Drain Current vs Frequency as a Function of Input Power

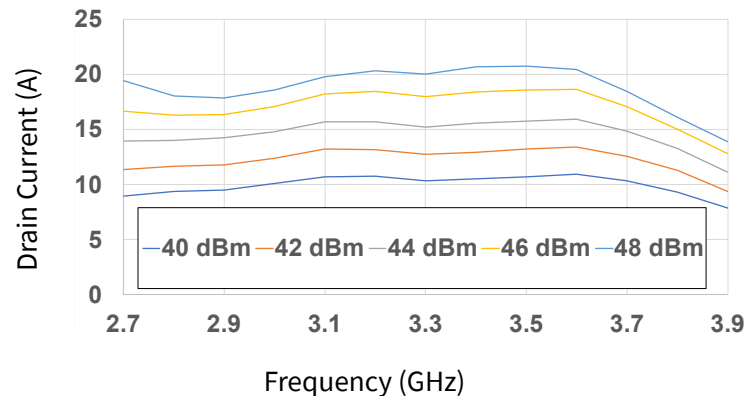

Typical Performance of the CGHV38375F

Test conditions unless otherwise noted: $V_D = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$, Pulse Width = $100\text{ }\mu\text{s}$, Duty Cycle = 10%, $P_{in} = 46\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

Figure 7. Output Power vs Frequency as a Function of V_D

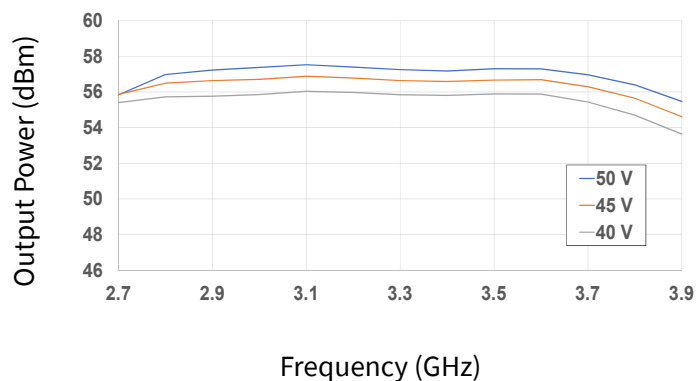


Figure 8. Output Power vs Frequency as a Function of I_{DQ}

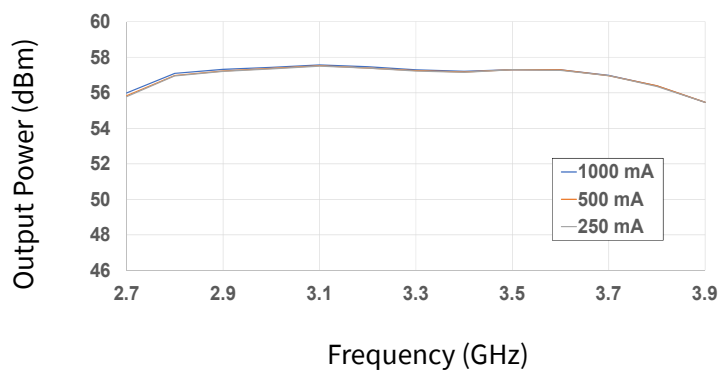


Figure 9. Drain Eff. vs Frequency as a Function of V_D

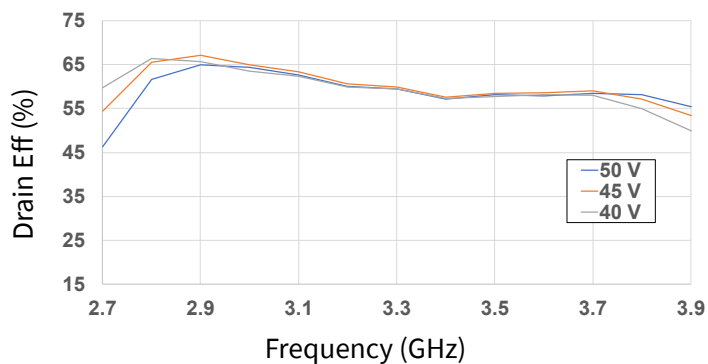


Figure 10. Drain Eff. vs Frequency as a Function of I_{DQ}

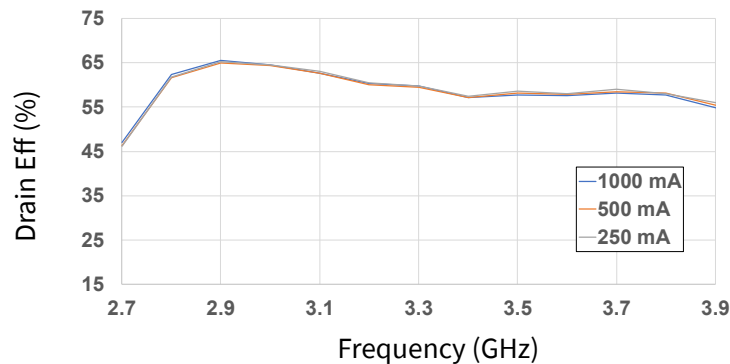


Figure 11. Drain Current vs Frequency as a Function of V_D


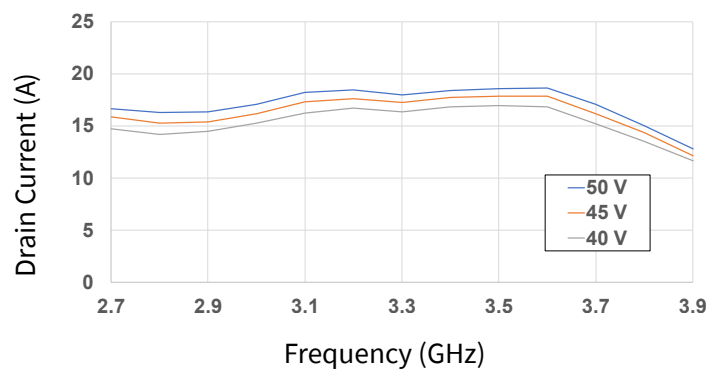


Figure 12. Drain Current vs Frequency as a Function of I_{DQ}

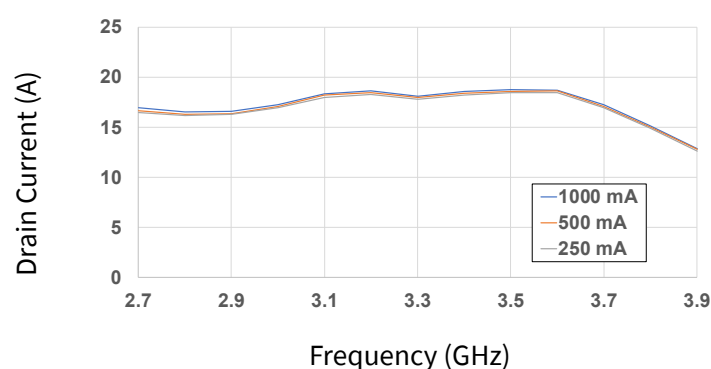

Typical Performance of the CGHV38375F

Test conditions unless otherwise noted: $V_D = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$, Pulse Width = $100\text{ }\mu\text{s}$, Duty Cycle = 10%, $P_{in} = 46\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

Figure 13. Output Power vs Input Power as a Function of Frequency

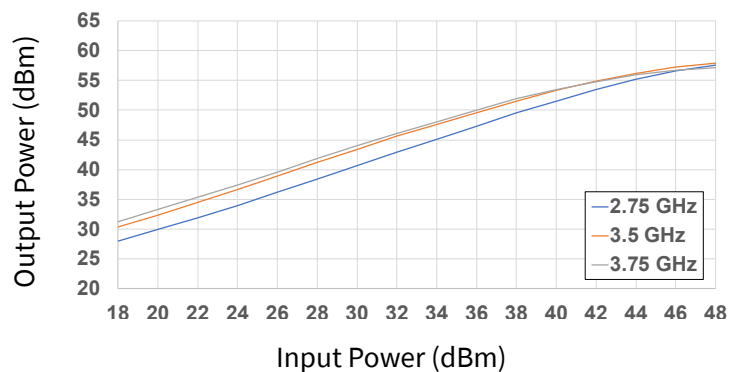


Figure 14. Drain Eff. vs Input Power as a Function of Frequency

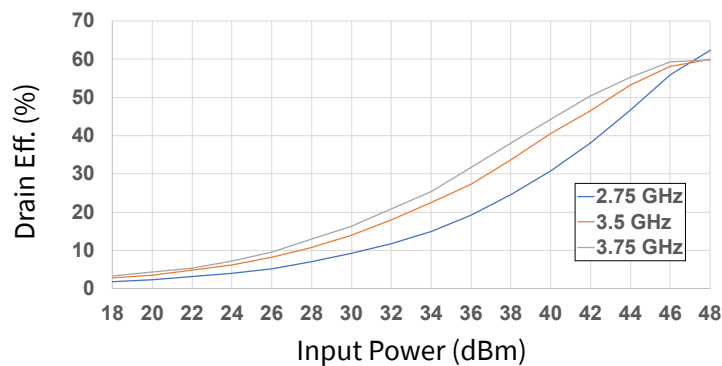


Figure 15. Large Signal Gain vs Input Power as a Function of Frequency

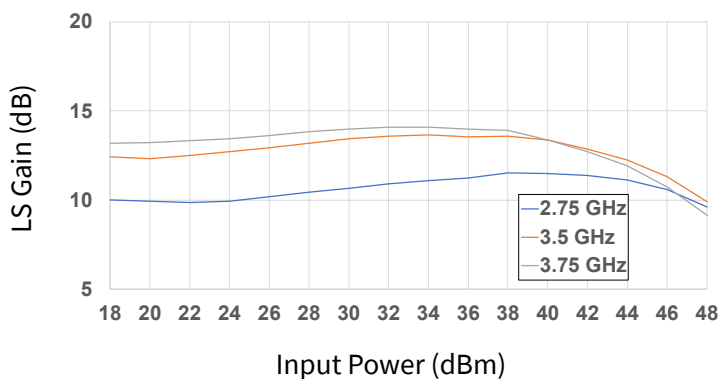


Figure 16. Drain Current vs Input Power as a Function of Frequency


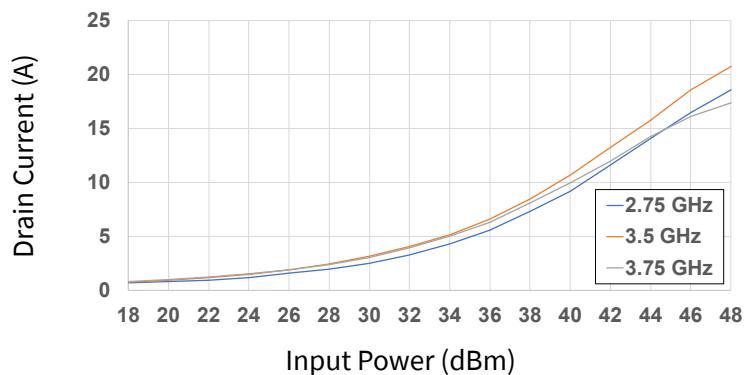


Figure 17. Gate Current vs Input Power as a Function of Frequency

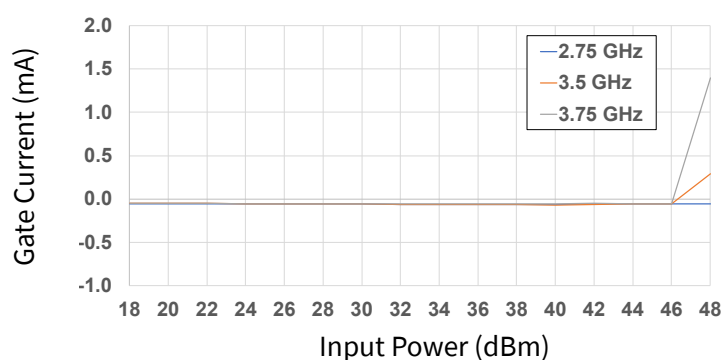

Typical Performance of the CGHV38375F

Test conditions unless otherwise noted: $V_D = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$, Pulse Width = $100\text{ }\mu\text{s}$, Duty Cycle = 10%, $P_{in} = 46\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

Figure 18. Output Power vs Input Power as a Function of Temperature

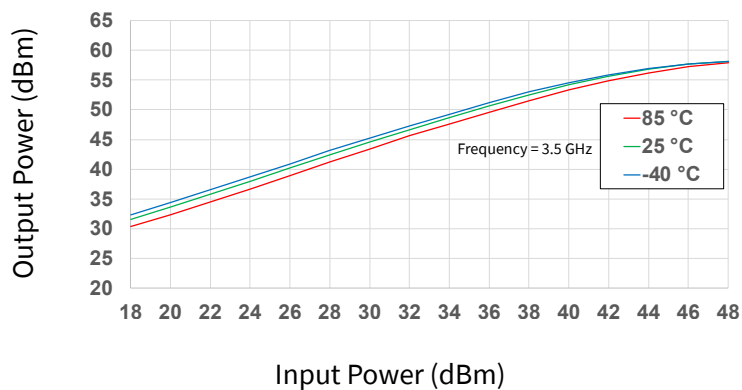


Figure 19. Drain Eff. vs Input Power as a Function of Temperature

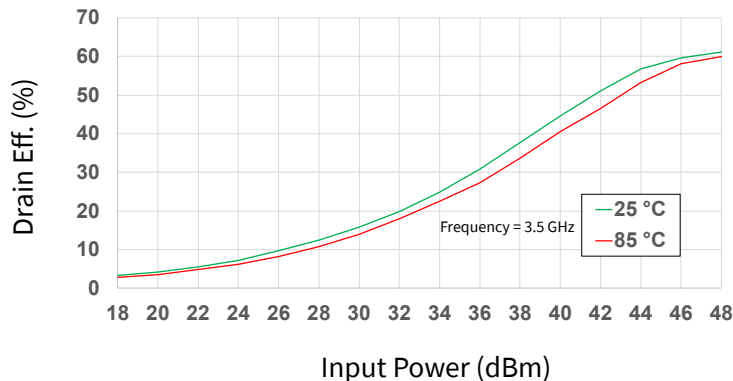


Figure 20. Large Signal Gain vs Input Power as a Function of Temperature

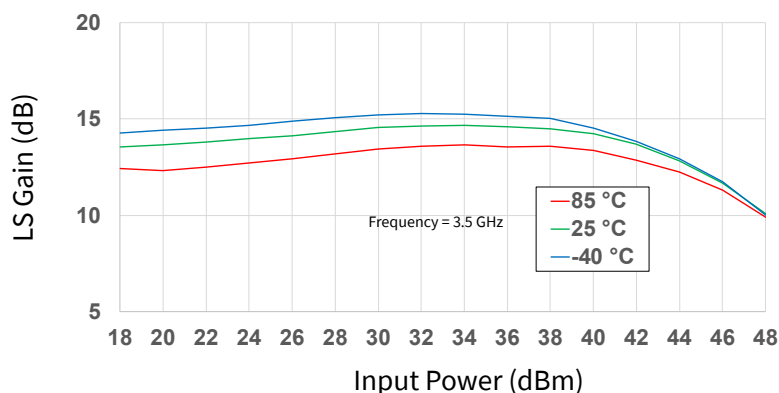


Figure 21. Drain Current vs Input Power as a Function of Temperature


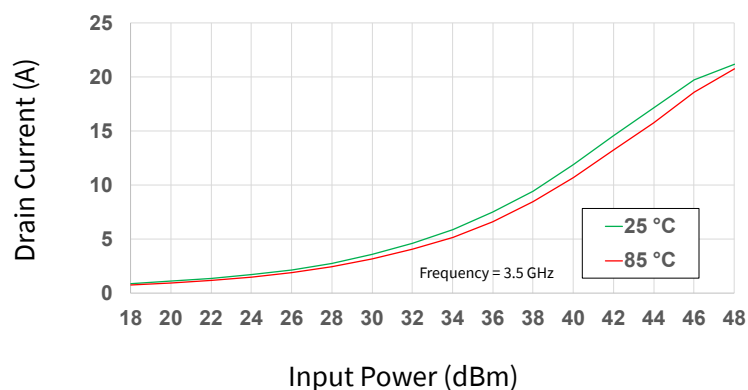


Figure 22. Gate Current vs Input Power as a Function of Temperature

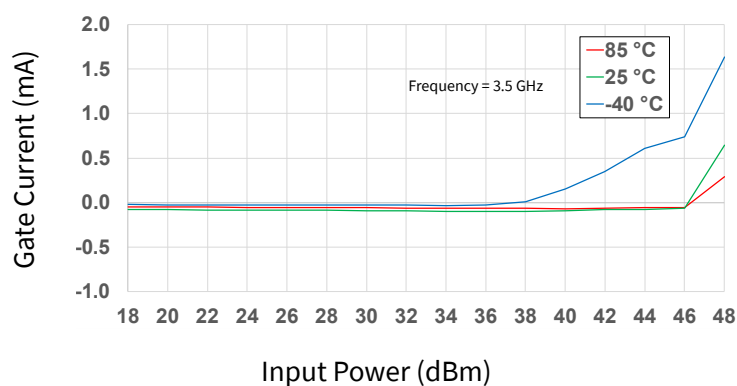

Typical Performance of the CGHV38375F

Test conditions unless otherwise noted: $V_D = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$, Pulse Width = $100\text{ }\mu\text{s}$, Duty Cycle = 10%, $P_{in} = 46\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

Figure 23. Output Power vs Input Power as a Function of IDQ

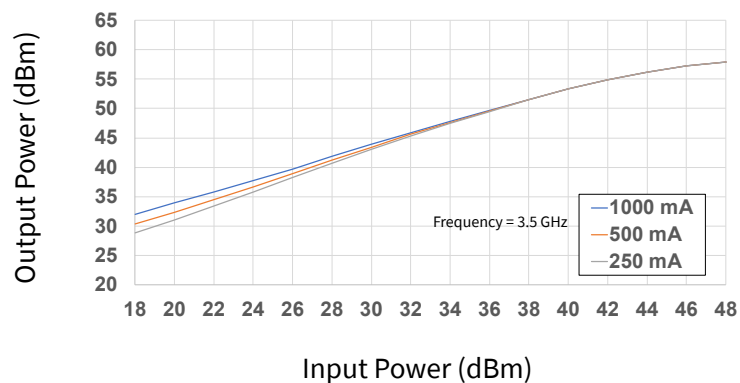


Figure 24. Drain Eff. vs Input Power as a Function of IDQ

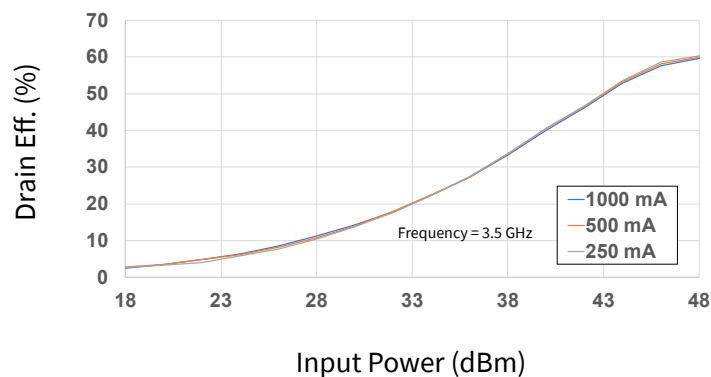


Figure 25. Large Signal Gain vs Input Power as a Function of IDQ

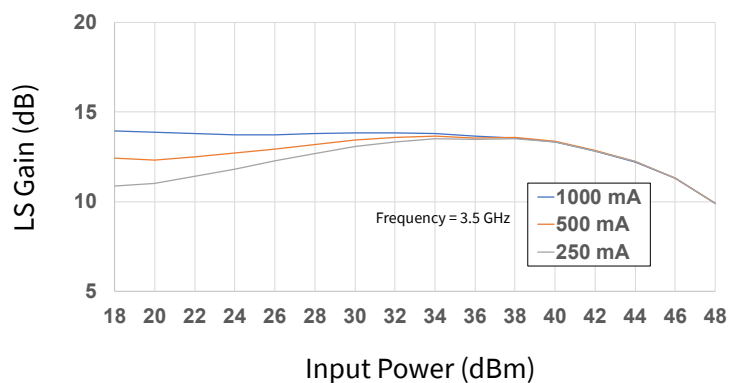


Figure 26. Drain Current vs Input Power as a Function of IDQ


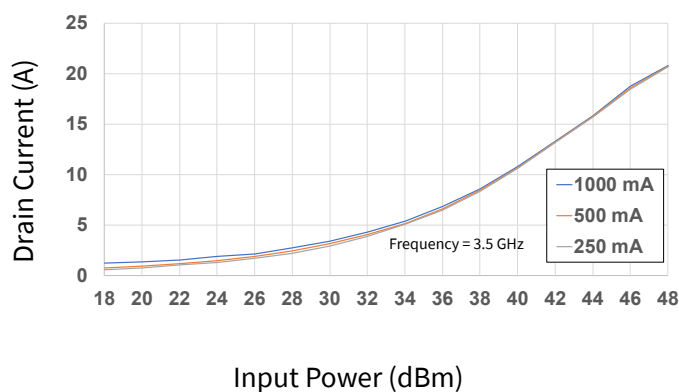


Figure 27. Gate Current vs Input Power as a Function of IDQ

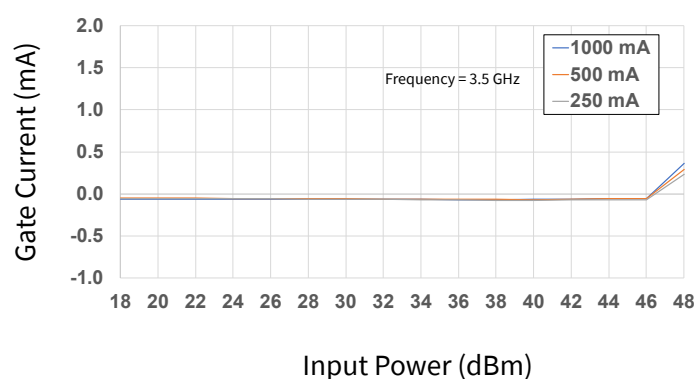

Typical Performance of the CGHV38375F

Test conditions unless otherwise noted: $V_D = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$, CW, $P_{in} = 43\text{ dBm}$, $T_{BASE} = +25\text{ }^{\circ}\text{C}$

Figure 28. Output Power vs Frequency as a Function of Temperature

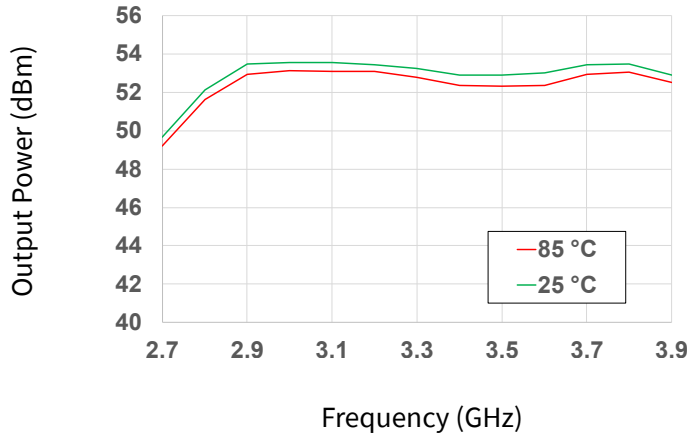


Figure 29. Output Power vs Frequency as a Function of Input Power

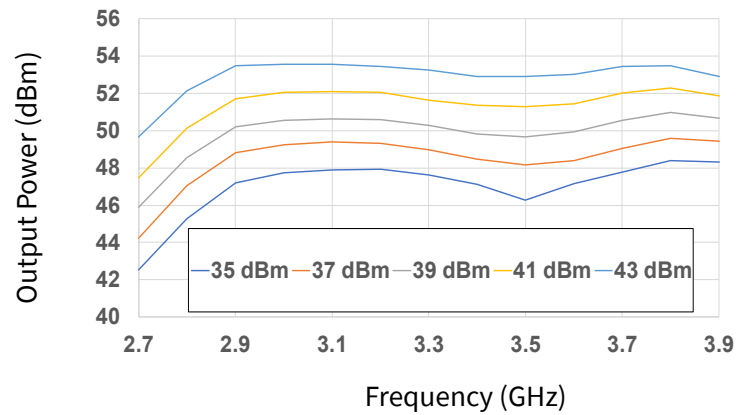


Figure 30. Drain Eff. vs Frequency as a Function of Temperature

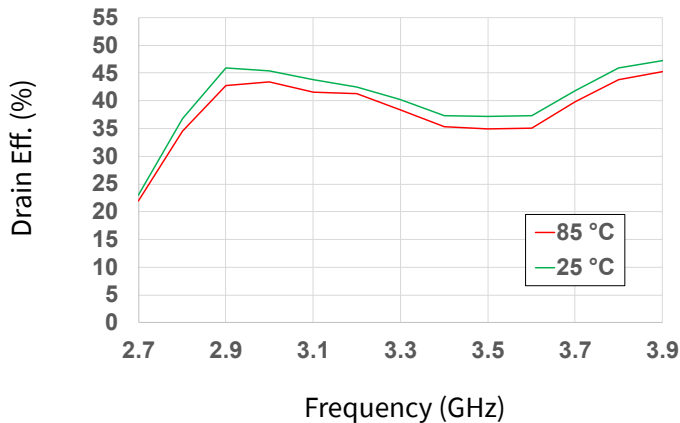


Figure 31. Drain Eff. vs Frequency as a Function of Input Power

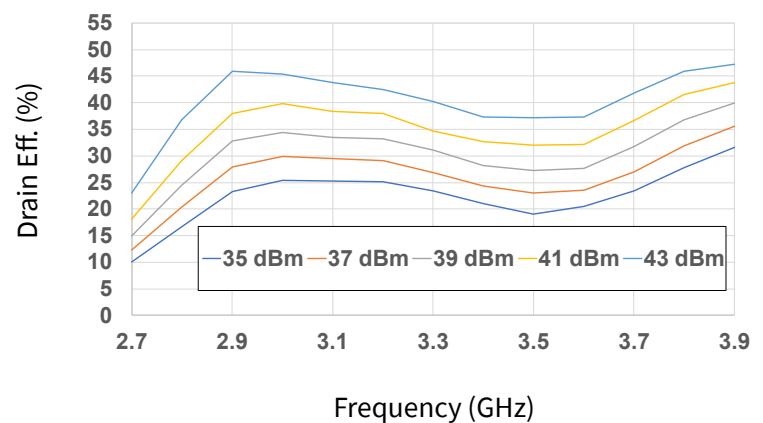


Figure 32. Drain Current vs Frequency as a Function of Temperature


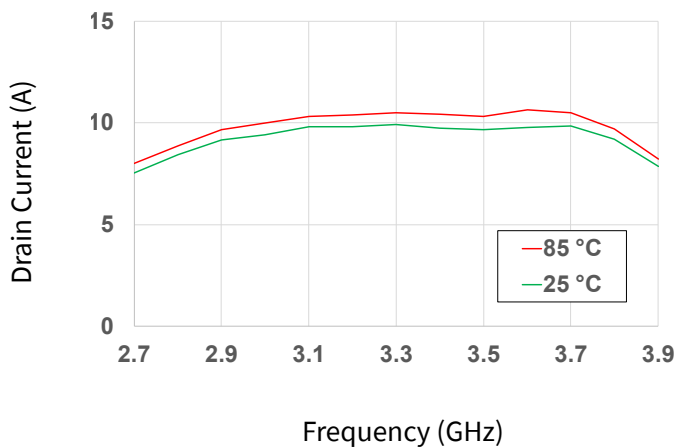


Figure 33. Drain Current vs Frequency as a Function of Input Power

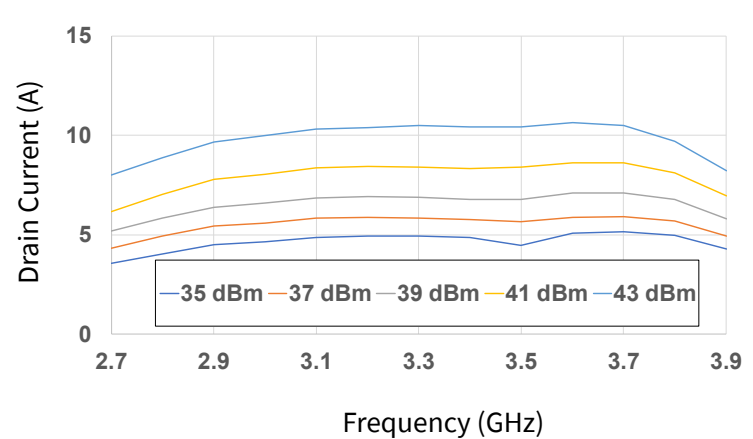

Typical Performance of the CGHV38375F

Test conditions unless otherwise noted: $V_D = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$, CW, $P_{in} = 43\text{ dBm}$, $T_{BASE} = +25^\circ\text{C}$

Figure 34. Output Power vs Frequency as a Function of Voltage

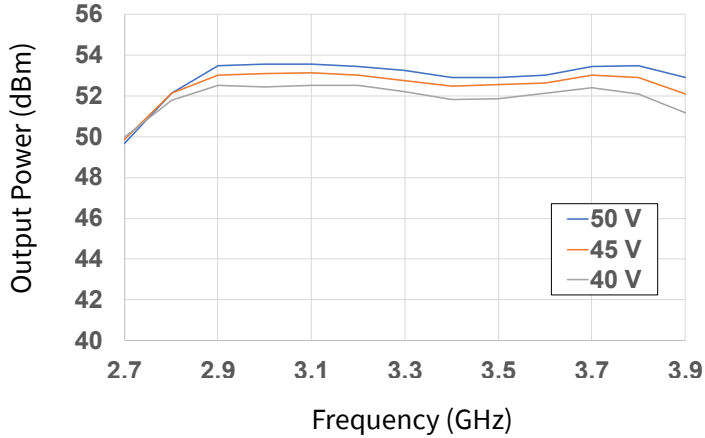


Figure 35. Output Power vs Frequency as a Function of IDQ

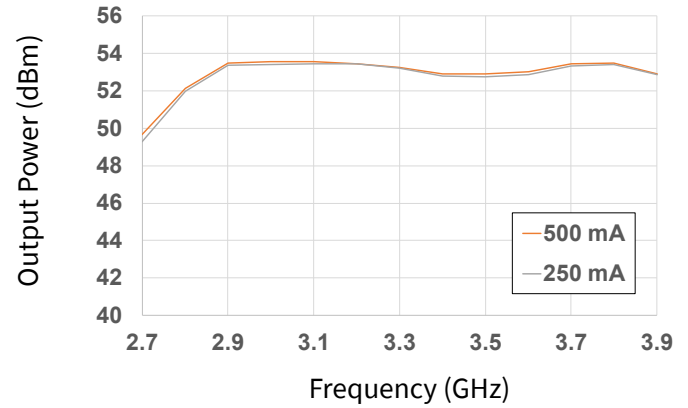


Figure 36. Drain Eff. vs Frequency as a Function of Voltage

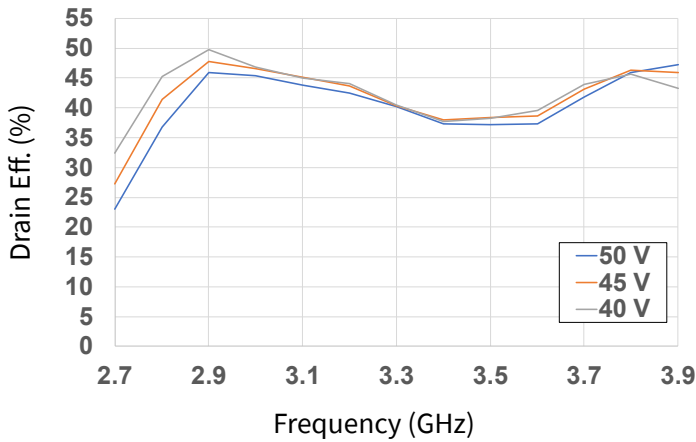


Figure 37. Drain Eff. vs Frequency as a Function of IDQ

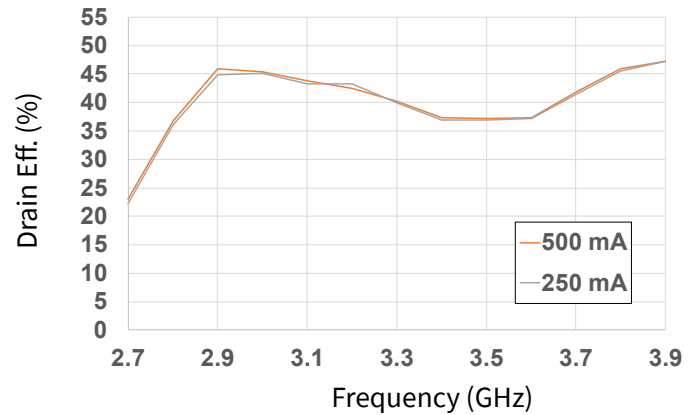


Figure 38. Drain Current vs Frequency as a Function of Voltage


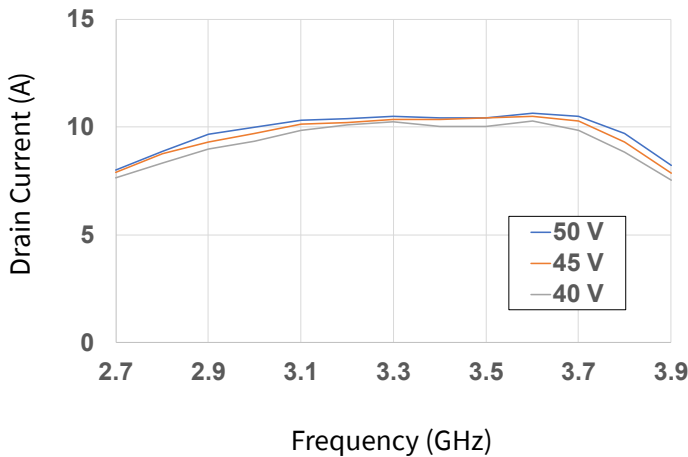


Figure 39. Drain Current vs Frequency as a Function of IDQ

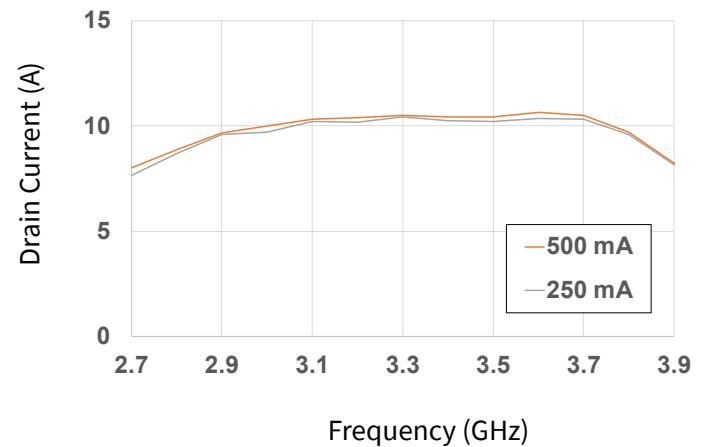

Typical Performance of the CGHV38375F

Test conditions unless otherwise noted: $V_0 = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$, CW, $P_{in} = 43\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

Figure 40. Output Power vs Input Power as a Function of Frequency

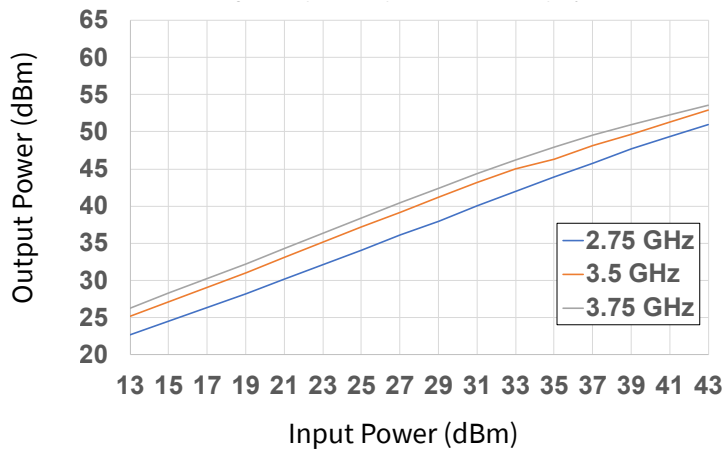


Figure 41. Drain Eff. vs Input Power as a Function of Frequency

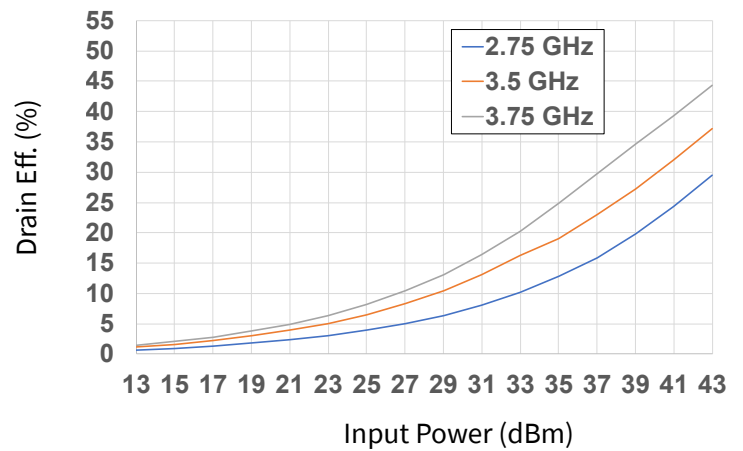


Figure 42. Large Signal Gain vs Input Power as a Function of Frequency

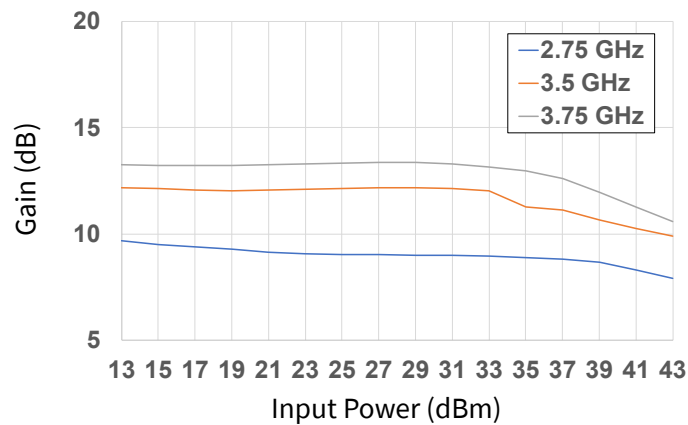


Figure 43. Drain Current vs Input Power as a Function of Frequency







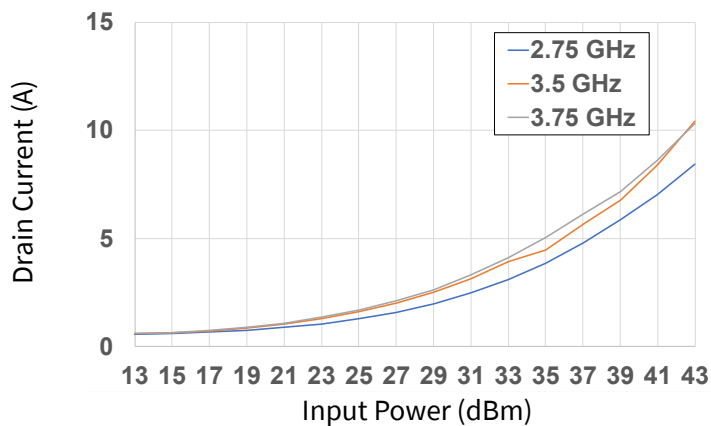


Figure 44. Gate Current vs Input Power as a Function of Frequency

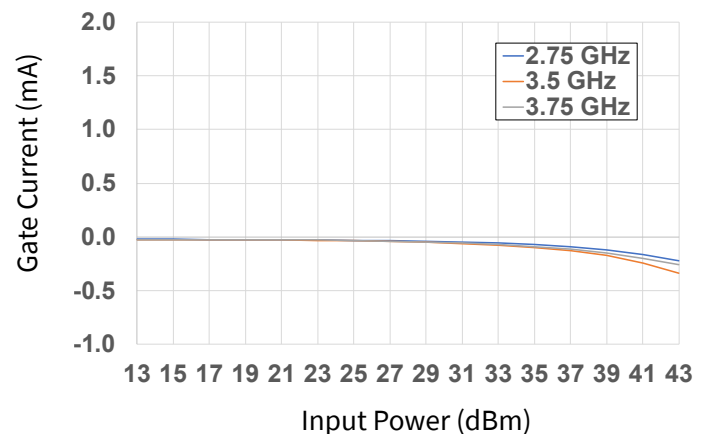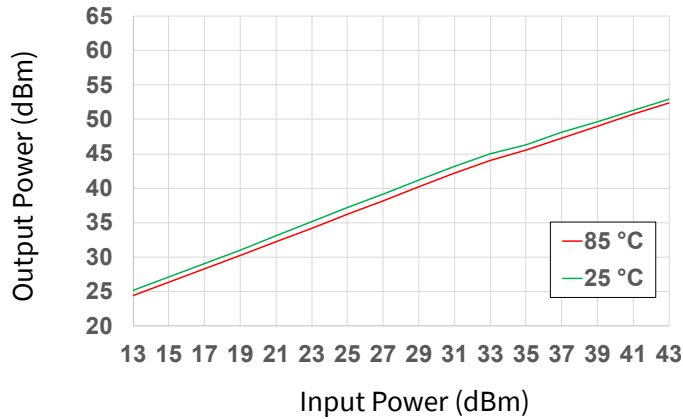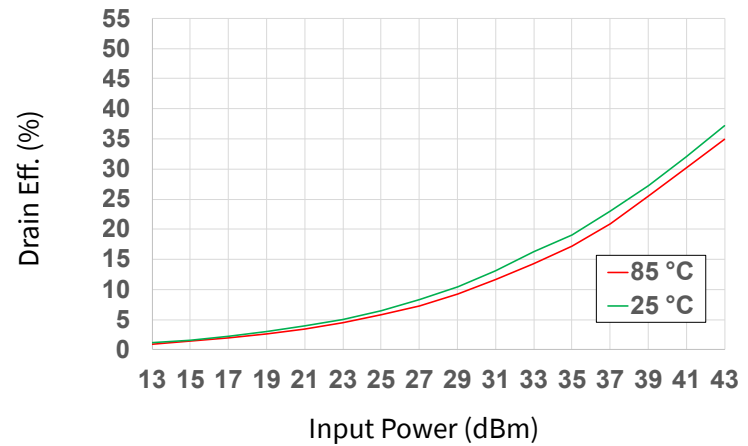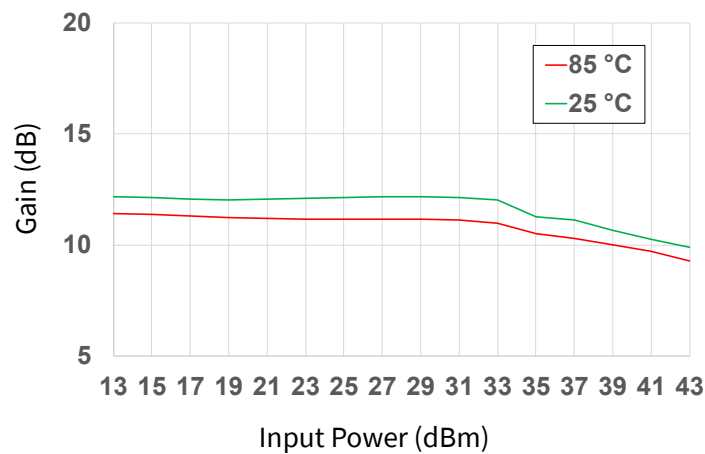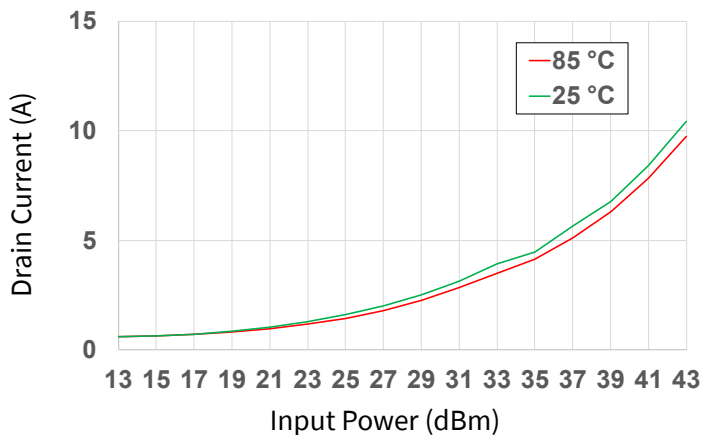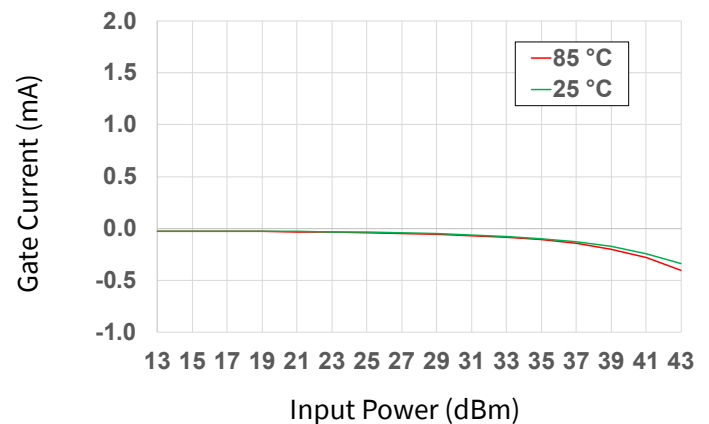

Typical Performance of the CGHV38375F

Test conditions unless otherwise noted: $V_D = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$, CW, $P_{in} = 43\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

Figure 45. Output Power vs Input Power as a Function of Temperature**Figure 46. Drain Eff. vs Input Power as a Function of Temperature****Figure 47. Large Signal Gain vs Input Power as a Function of Temperature****Figure 48. Drain Current vs Input Power as a Function of Temperature****Figure 49. Gate Current vs Input Power as a Function of Temperature**

Typical Performance of the CGHV38375F

Test conditions unless otherwise noted: $V_D = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$, CW, $P_{in} = 43\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$

Figure 50. Output Power vs Input Power as a Function of IDQ

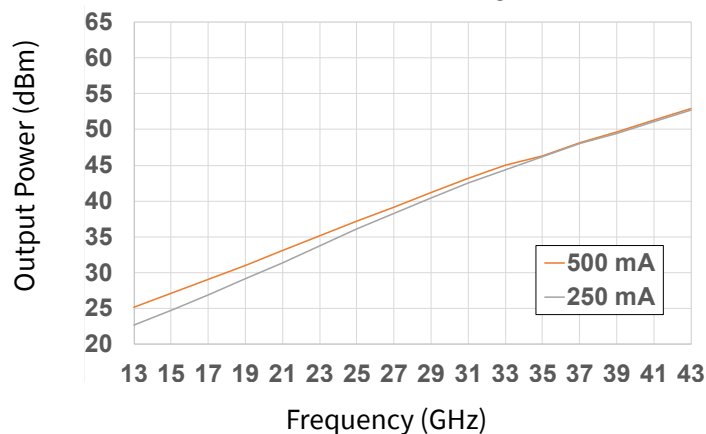


Figure 51. Drain Eff. vs Input Power as a Function of IDQ

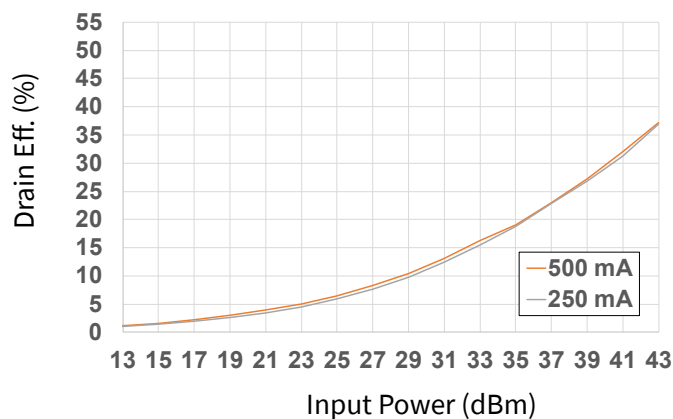


Figure 52. Large Signal Gain vs Input Power as a Function of IDQ

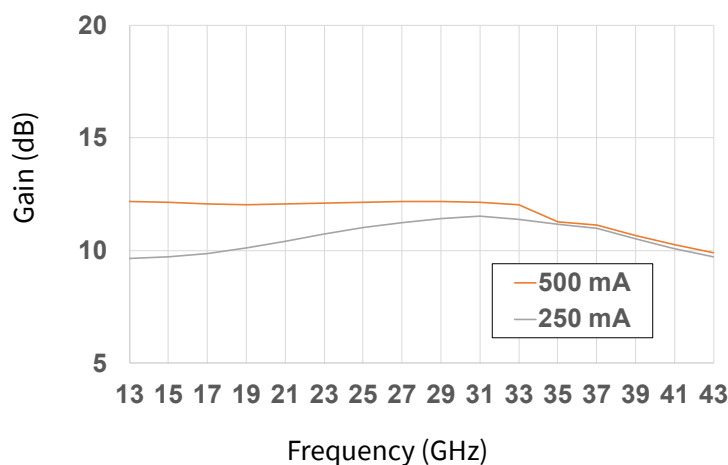


Figure 53. Drain Current vs Input Power as a Function of IDQ


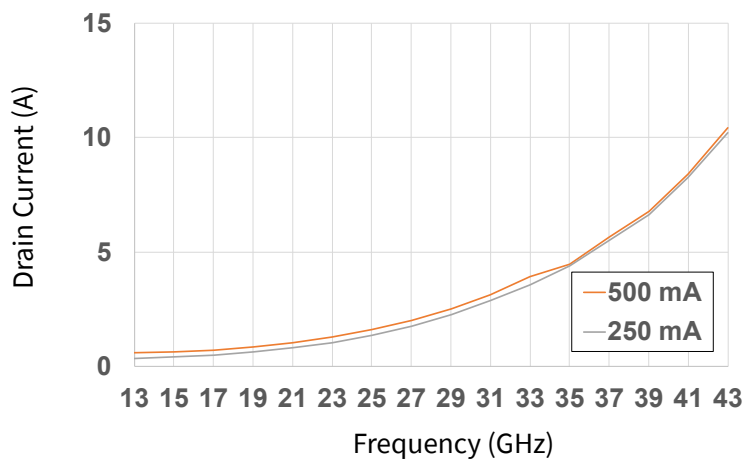


Figure 54. Gate Current vs Input Power as a Function of IDQ

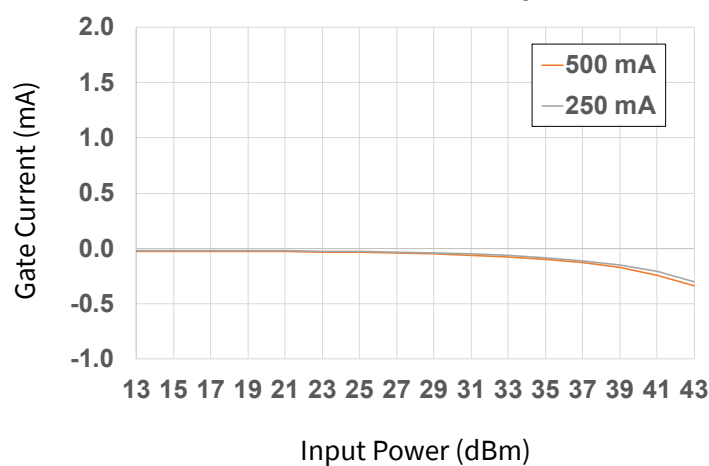

Typical Performance of the CGHV38375F

Test conditions unless otherwise noted: $V_D = 50$ V, $I_{DQ} = 500$ mA, Pulse Width = 100 μ s, Duty Cycle = 10%, $P_{in} = 46$ dBm, $T_{BASE} = +25$ °C

Figure 55. 2nd Harmonic vs Frequency as a Function of Temperature

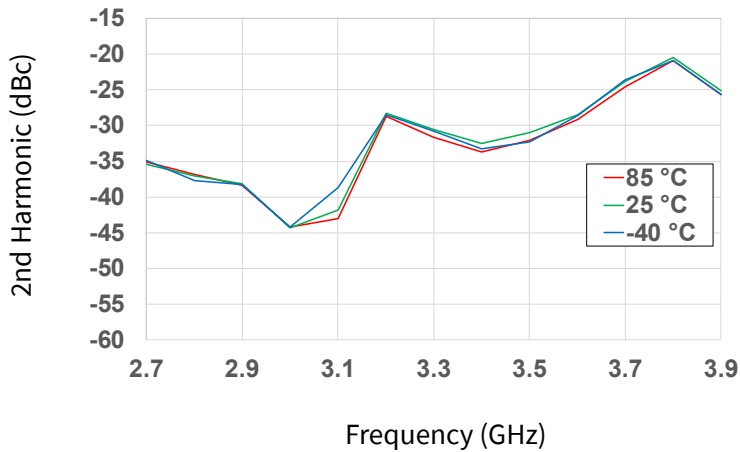


Figure 56. 3rd Harmonic vs Frequency as a Function of Temperature

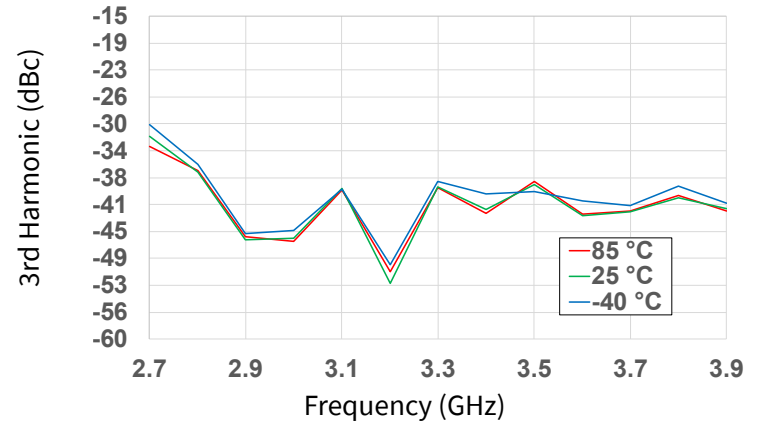


Figure 57. 2nd Harmonic vs Output Power as a Function of Frequency

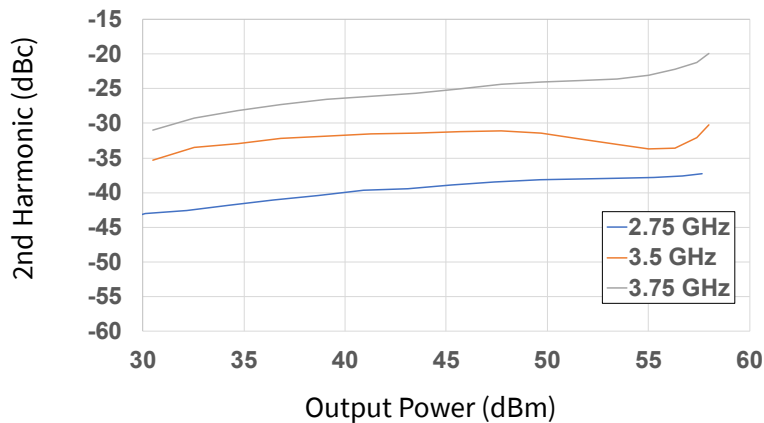


Figure 58. 3rd Harmonic vs Output Power as a Function of Frequency

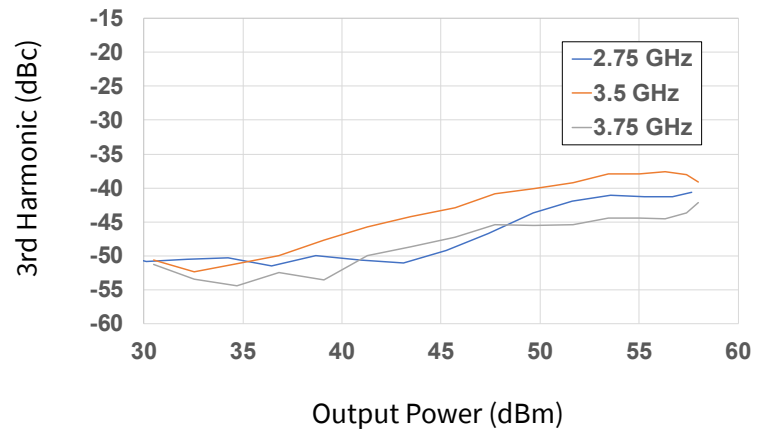


Figure 59. 2nd Harmonic vs Output Power as a Function of IDQ








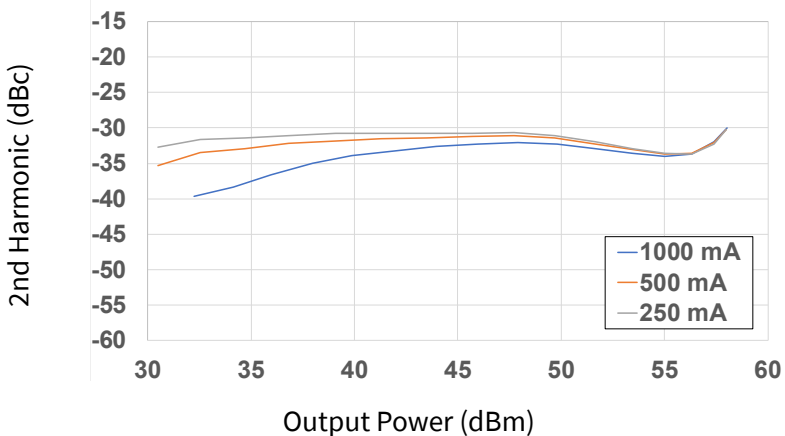


Figure 60. 3rd Harmonic vs Output Power as a Function of IDQ

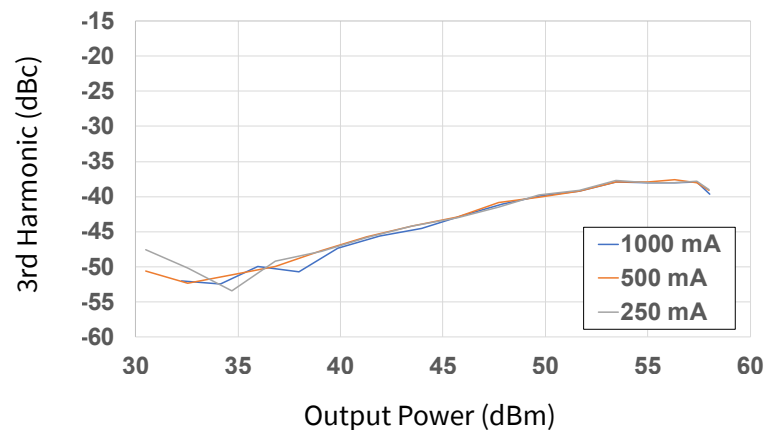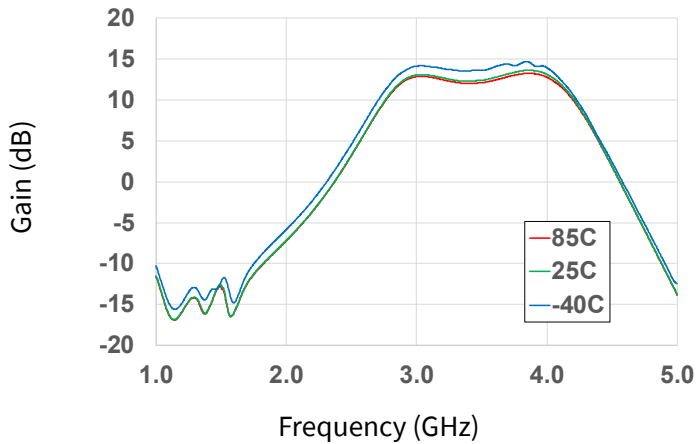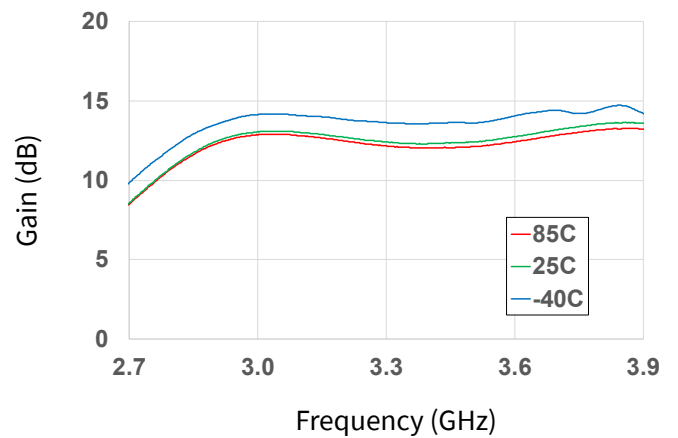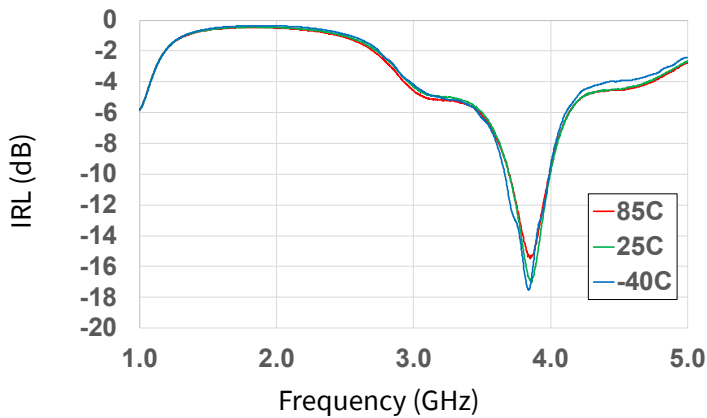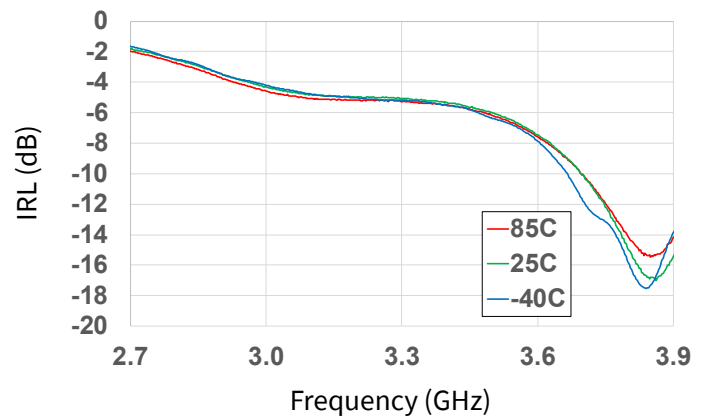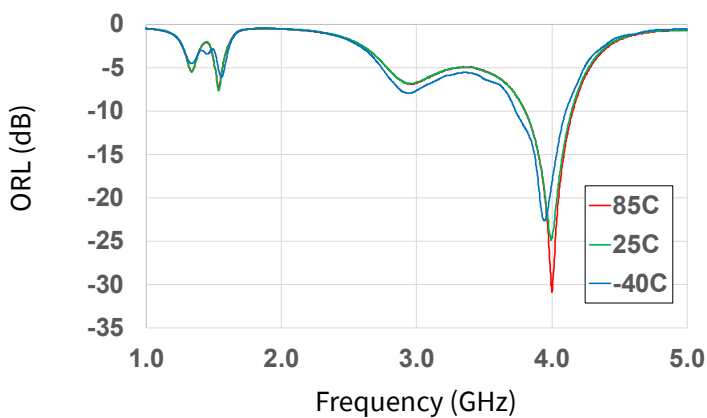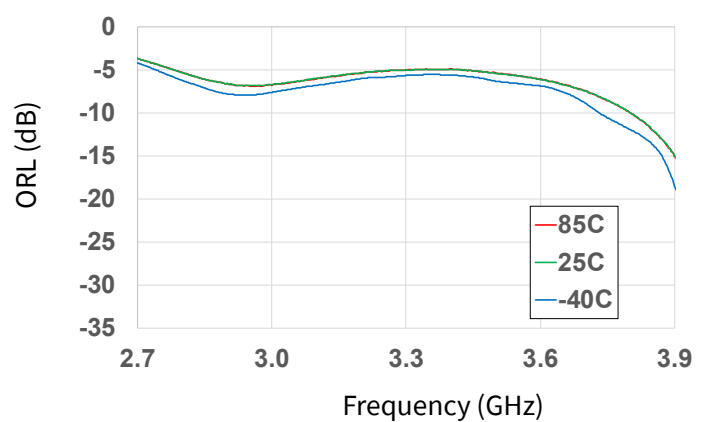







Typical Performance of the CGHV38375F

Test conditions unless otherwise noted: $V_D = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$, $P_{in} = -10\text{ dBm}$, $T_{BASE} = +25\text{ }^\circ\text{C}$


Figure 61. Gain vs Frequency as a Function of Temperature**Figure 62. Gain vs Frequency as a Function of Temperature****Figure 63. Input RL vs Frequency as a Function of Temperature****Figure 64. Input RL vs Frequency as a Function of Temperature****Figure 65. Output RL vs Frequency as a Function of Temperature****Figure 66. Output RL vs Frequency as a Function of Temperature**

Typical Performance of the CGHV38375F


Test conditions unless otherwise noted: $V_D = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$, $\text{Pin} = -10\text{ dBm}$, $T_{\text{BASE}} = +25^\circ\text{C}$

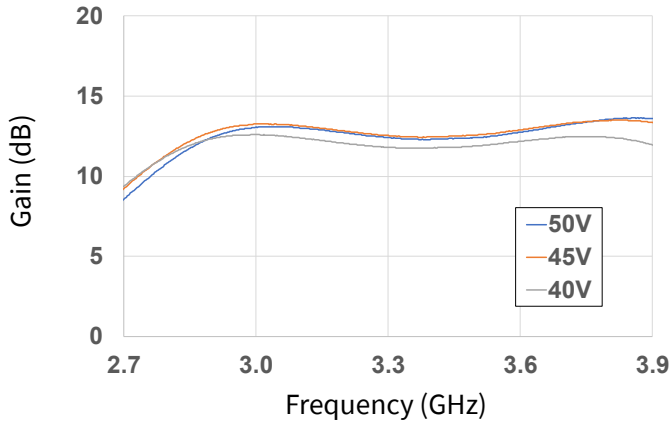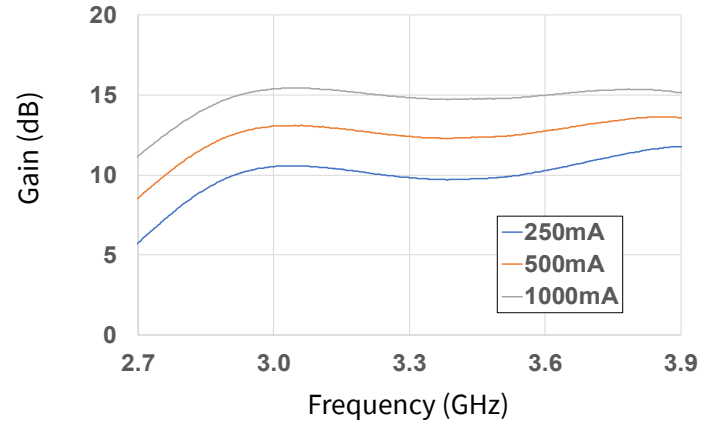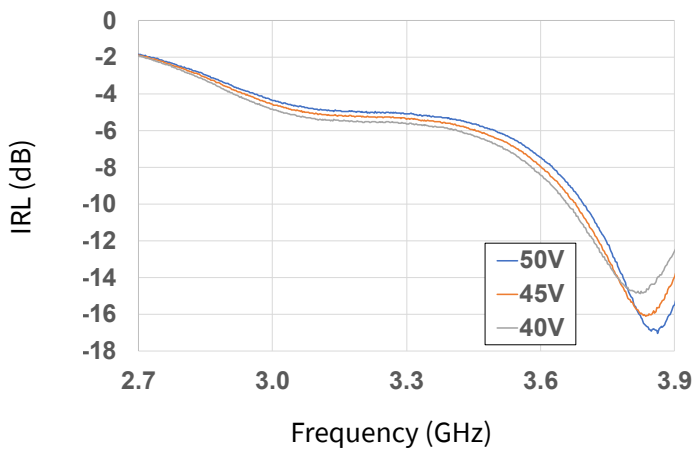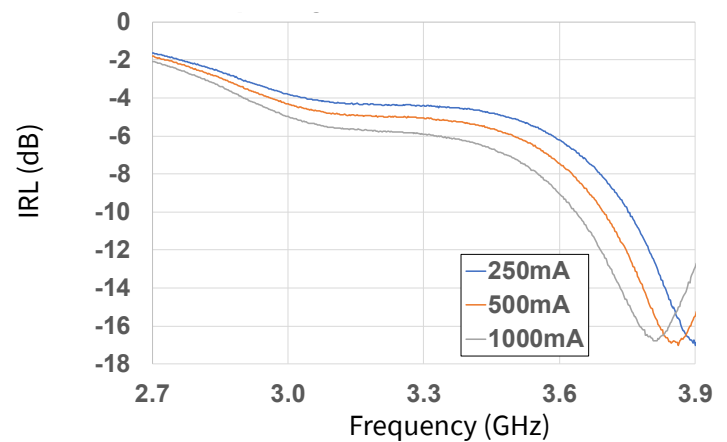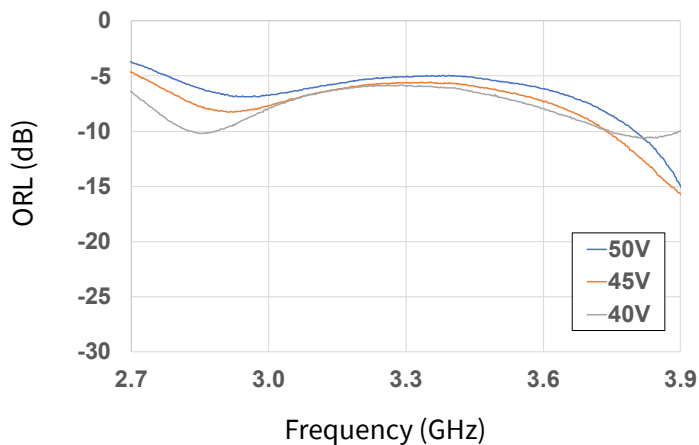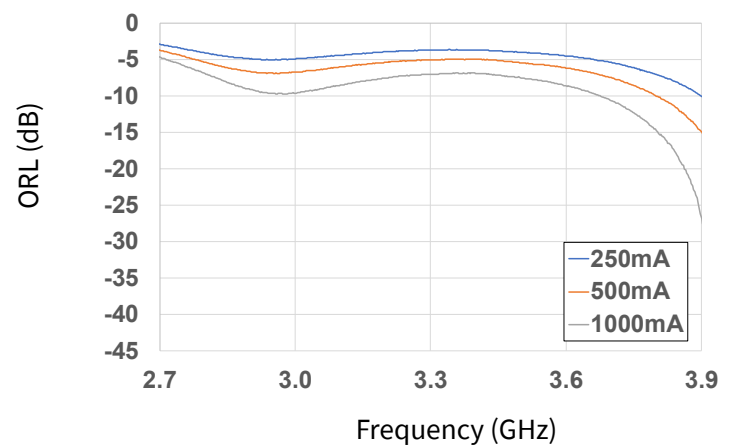Figure 67. Gain vs Frequency as a Function of Voltage**Figure 68. Gain vs Frequency as a Function of IDQ****Figure 69. Input RL vs Frequency as a Function of Voltage****Figure 70. Input RL vs Frequency as a Function of IDQ****Figure 71. Output RL vs Frequency as a Function of Voltage****Figure 72. Output RL vs Frequency as a Function of IDQ**

CGHV38375F-AMP Evaluation Board Schematic

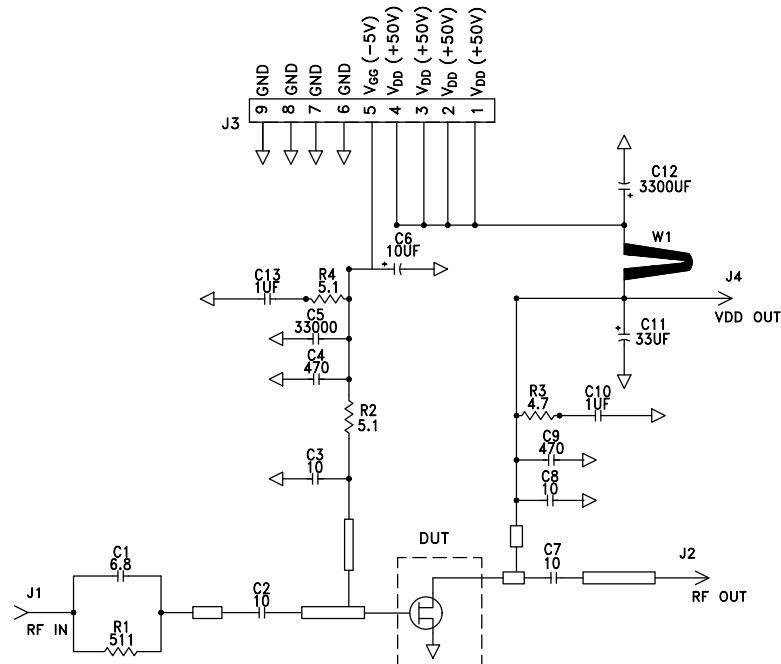

CGHV38375F-AMP Evaluation Board Outline

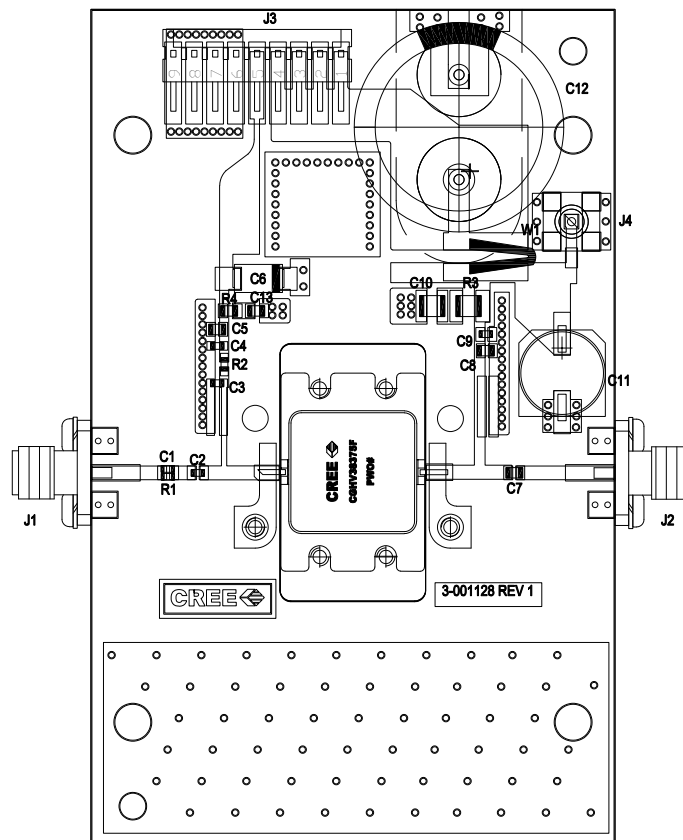

CGHV38375F-AMP Evaluation Board Bill of Materials

Designator	Description	Qty
R1	RES, 511 OHM, +/- 1%, 1/16W,0603	1
R2, R4	RES, 5.1,OHM, +/- 1%, 1/16W,0603	2
R3	RES, 4.7 OHM, 1%, 1/4W, 1206	1
C1	CAP, 6.8pF, +/- 0.25 pF,250V, 0603	1
C2,C7,C8	CAP, 10pF, +/- 1%, 250V, 0805	3
C3	CAP, 10.0pF, +/-5%,250V, 0603,	1
C4,C9	CAP, 470PF, 5%, 100V, 0603, X	2
C5	CAP,33000PF, 0805,100V, X7R	1
C6	CAP 10UF 16V TANTALUM	1
C10	CAP, 1.0UF, 100V, 10%, X7R, 1210	1
C11	CAP, 33 UF, 20%, G CASE	1
C12	CAP, 3300 UF, +/-20%, 100V, ELECTROLYTIC	1
C13	CAP, 1UF, 0805, 100V, X7S	1
J1,J2	CONN, SMA, PANEL MOUNT JACK, FL	2
J3	HEADER RT>PLZ .1CEN LK 9POS	1
J4	CONNECTOR ; SMB, Straight, JACK,SMD	1
W1	CABLE ,18 AWG, 4.2	1
	PCB, RF35-TC, 2.5 X 4.0 X 0.030	1
	BASEPLATE, AL, 4.0 X 2.5X 0.5	1
	2-56 SOC HD SCREW 1/4 SS	4
	#2 SPLIT LOCKWASHER SS	4
Q1	Transistor CGHV38375F	1

Electrostatic Discharge (ESD) Classifications

Parameter	Symbol	Class	Test Methodology
Human Body Model	HBM	1B (≥ 500 V)	JEDEC JESD22 A114-D
Charge Device Model	CDM	II (≥ 200 V)	JEDEC JESD22 C101-C


Moisture Sensitivity Level (MSL) Classification

Parameter	Symbol	Level	Test Methodology
Moisture Sensitivity Level	MSL	3 (168 hours)	IPC/JEDEC J-STD-20

Product Dimensions CGHV38375F (Package 440226)

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. INTERPRET DRAWING IN ACCORDANCE WITH ANSI Y14.5M-2009
2. ADHESIVE FROM LID MAY EXTEND A MAXIMUM OF .020 BEYOND EDGE OF LID
3. LID MAY BE MISALIGNED TO THE BODY OF PACKAGE BY A MAXIMUM OF .008 IN ANY DIRECTION
4. ALL PLATED SURFACES ARE GOLD OVER NICKEL

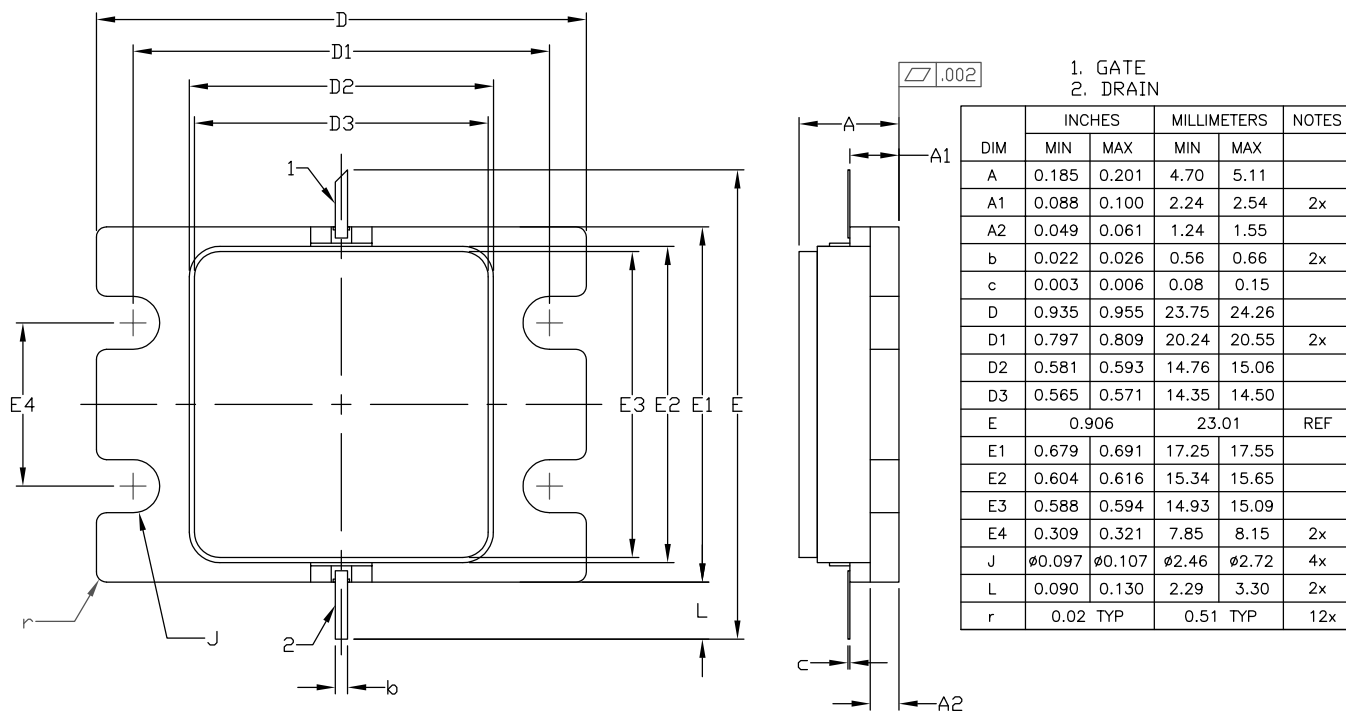

PIN	DESC.
1	RFIN
2	RFOUT
3	SOURCE/FLANGE

Part Number System

CGHV38375F



Table 1.

Parameter	Value	Units
Lower Frequency	2.75	GHz
Upper Frequency	3.75	GHz
Power Output	375	W
Package	Flange	-

Note 1: Alpha characters used in frequency code indicate a value greater than 9.9 GHz. See Table 2 for value.

Table 2.

Character Code	Code Value
A	0
B	1
C	2
D	3
E	4
F	5
G	6
H	7
J	8
K	9
Examples:	1A = 10.0 GHz 2H = 27.0 GHz

Product Ordering Information

Order Number	Description	Unit of Measure	Image
CGHV38375F	GaN HEMT	Each	
CGHV38375F-AMP	Test board with GaN HEMT installed	Each	

For more information, please contact:

4600 Silicon Drive
Durham, North Carolina, USA 27703
www.wolfspeed.com/RF

Sales Contact
RFSales@wolfspeed.com

RF Product Marketing Contact
RFMarketing@wolfspeed.com

Notes

Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. “Typical” parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer’s technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.