

Commercial Grade Dispensable Epoxy Absorber



MATERIAL

Two-part liquid, magnetic epoxy resin




FEATURES

- Reduces RF signals, suppresses standing waves and RF noise
- Adheres well to metal surfaces, no need for die-cutting or tape
- Electrically equivalent to cavity resonance sheet absorber products

PROPERTIES	CR-DE 1.0
Construction & Composition	2-part kits in different cartridge sizes; dispensing service included
Color	Dark Grey
Density	3.49 g/cm ³


PROPERTIES	CR-DE 1.0
Softness	70 Shore A
Operating Temperature	-55 to 125 °C
Flammability Rating	UL 94 HB

Permittivity and Permeability

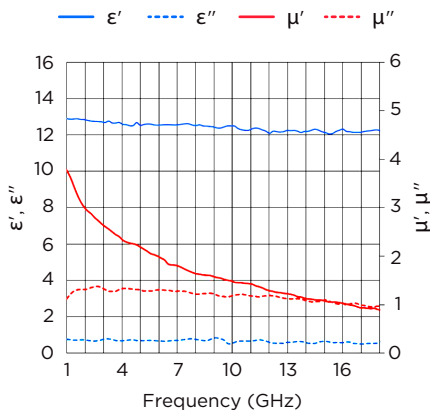


Attenuation

Based on the test result of permittivity and permeability

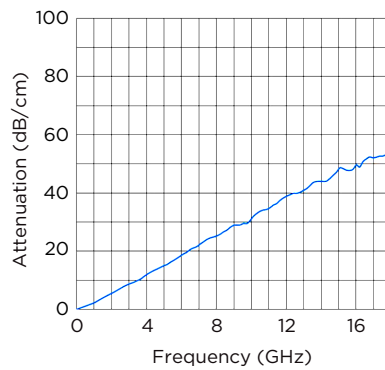

Cavity Resonance

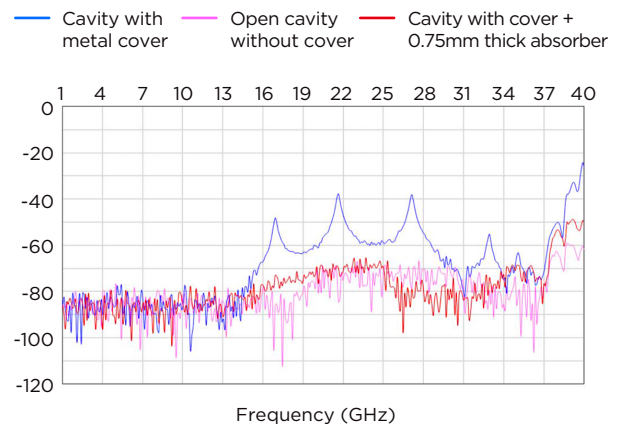

GET IN TOUCH

EMAIL: SUPPORT@TENNMAXUSA.COM

TEL: +1 360-567-0707



TENNMAXUSA.COM