

# Commercial Grade Cavity Resonance Absorber Pad



**MATERIAL**  
Silicone rubber




- FEATURES**
- Survives outdoor exposure and wide working temperature range
  - Flexible, can be cut and fitted to compound curves
  - Low outgassing
  - RoHS compliant and halogen free

PROPERTIES	CR-SS 1.0		
Thickness	0.50 mm	0.75 mm	1.00 mm
Adhesive Thickness	0.05 mm		
Elastomer	Silicone		
Density	3.34 g/cm <sup>3</sup>		
Softness	54 Shore A		


PROPERTIES	CR-SS 1.0
Operating Temperature	-65 to 200 °C
Flammability Rating	VO UL 94
Standard Sheet Size	12 inch x 12 inch
With PSA Backing	YY = 00
Without PSA Backing	YY = 01

**Permittivity and Permeability**

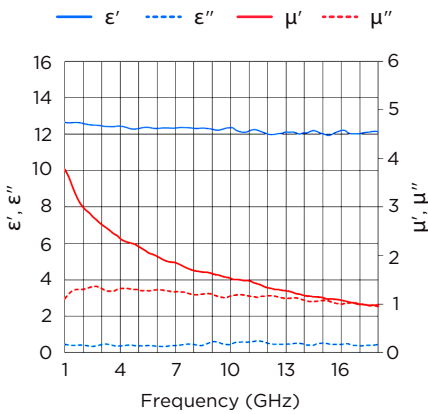


**Attenuation**

Based on the test result of permittivity and permeability

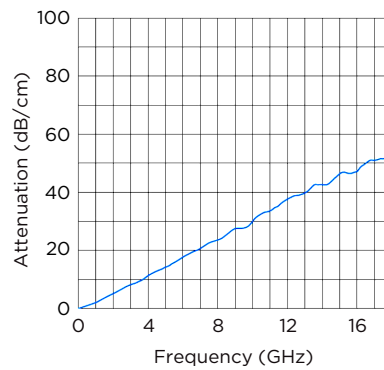

**Cavity Resonance**

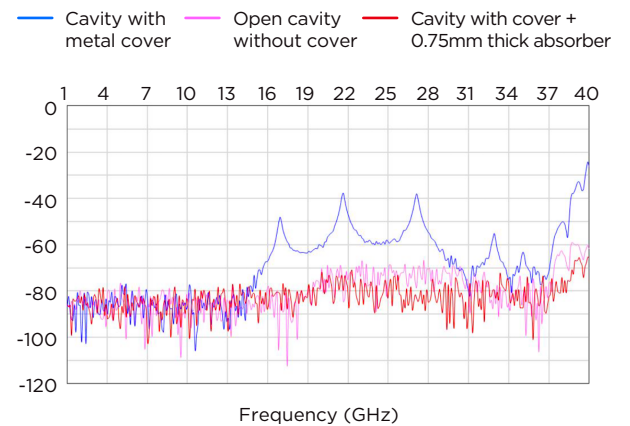

GET IN TOUCH

EMAIL: [SUPPORT@TENNMAXUSA.COM](mailto:SUPPORT@TENNMAXUSA.COM)

TEL: +1 360-567-0707



TENNMAXUSA.COM

This information and our technical advice – whether verbal, in writing or by way of trials – are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with our General Conditions of Sale and Delivery.